




LINGLONG TYRES

2009.4
LINGLONG GROUP



CONTENTS

Brief introduction.....	2-3
Explanation of Symbols.....	4
Radial Truck Tyres.....	5-11
Radial OTR Tyres.....	12
Ultra High Performance & Winter Tyres.....	13

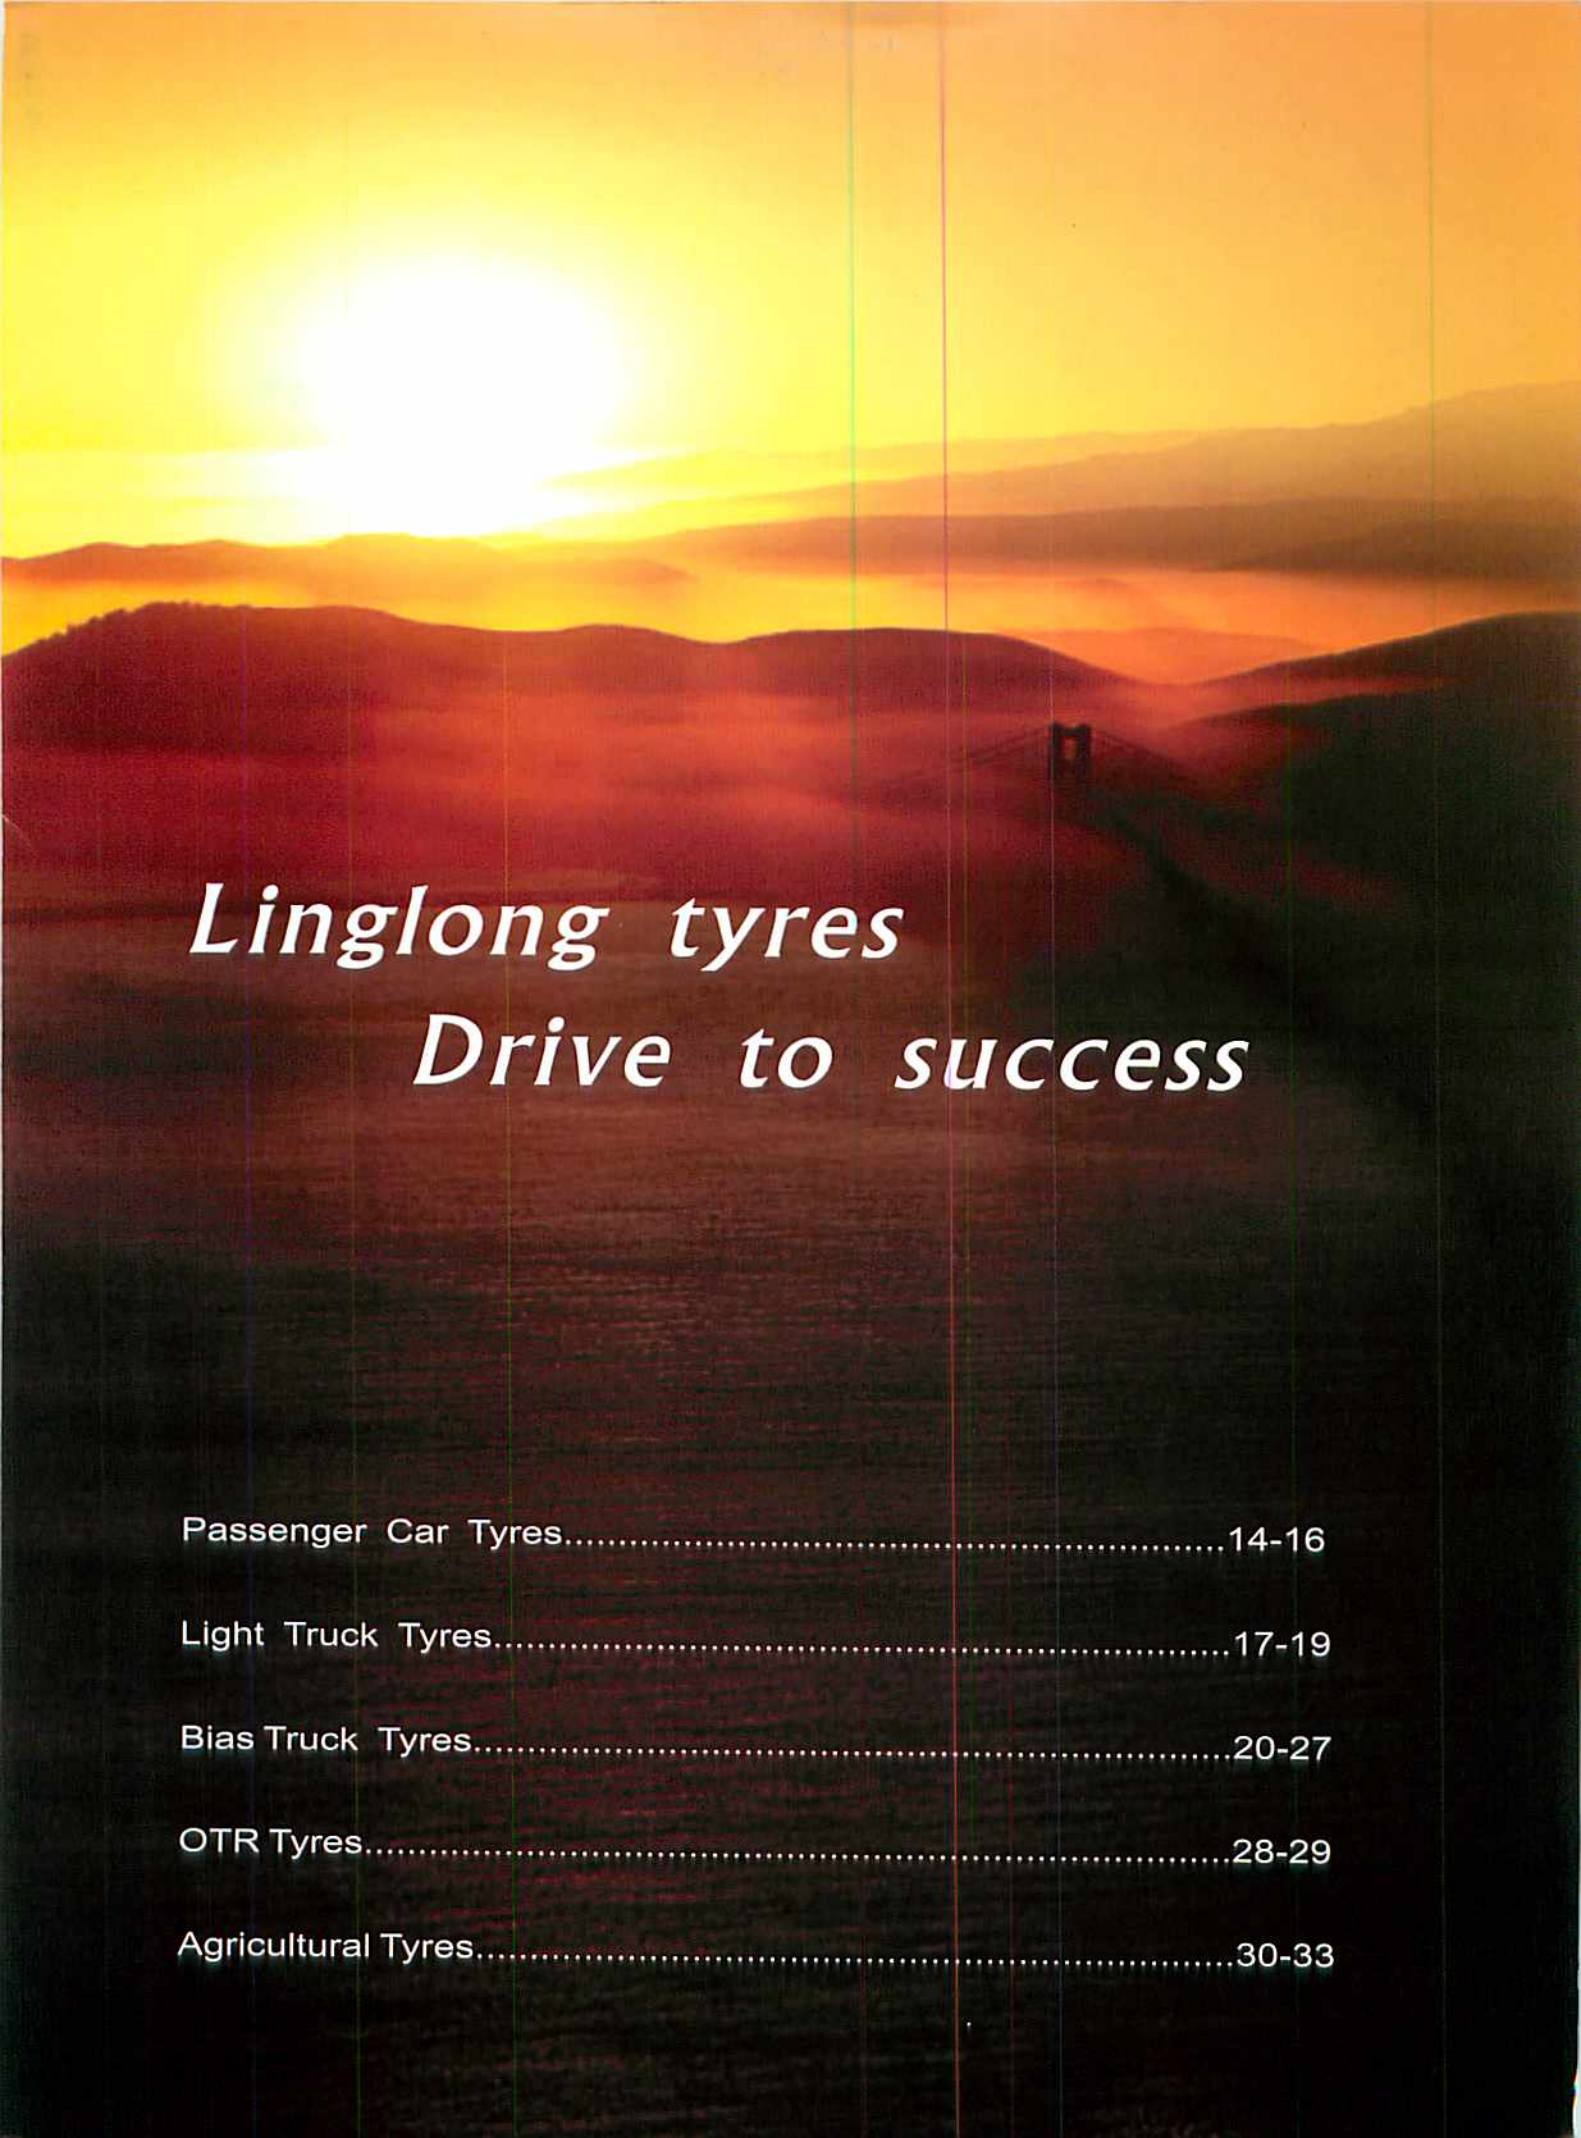

Linglong tyres
Drive to success

Passenger Car Tyres.....	14-16
Light Truck Tyres.....	17-19
Bias Truck Tyres.....	20-27
OTR Tyres.....	28-29
Agricultural Tyres.....	30-33

/ Brief Introduction

Linglong Group is located in the city of Zhaoyuan-the gold and vermicelli producing area. The eastward is the port city of Yantai. The westward is Weifang-The National Kite City, and the city of Qingdao is its southern and to the northward of it is the Longkou port. The Location is super and the transportation is developed.

Linglong Group is a national large grade enterprise. There are 9500 workers, including 1600 technicians. Its total assets are RMB6,200,000,000. Its main products are various sizes of "Linglong", "Shanling" and "Leao" brand bias tyres, passenger radial tyres and truck radial tyres, as well as various sizes of rims. It can produce 20,000,000 sets of tyres, 500,000 pieces of rims every year. It also produces rubber machinery and agricultural machinery etc. In 1994, it was granted the independence right of export and import, and passed the DOT and ECE. In 2006, it took the lead in passing the certification of QS9000 and ISO/TS16949:2002 in our country. In 2007, it took the lead in passing the ISO14001:2004. "Linglong" brand tyres was named as "Shandong famous brand" and "Chinese famous brand merchandise" successively. "Linglong" brand was named as "Shandong province well-known brand". The enterprise was named as "National trade exemplary enterprise for quality, Service and credit", and "National exemplary enterprise for trade quality", by the Chinese Quality Test Association, and gained the honorable title of "Chinese credit enterprise", "Provincial advanced enterprise", "Chemical excellent enterprise". "Clean and civilization factory", "Non-leaking factory" and "Star enterprise" and "the finest enterprise". etc, and granted the title of "Chinese enterprise image AAA grade" from Chinese Council for Approval of Enterprise Image.

Linglong Group is one of the ten biggest enterprises in the tyre industrial in our country. In the "10.5" period, the enterprise will put in more technology and capital to strengthen the group's scope. To the end of 2011, the total production capacity will reach 30 million sets of tyres, the sales income 20 billion and will reach.

Strive for the highly efficient and highly profited



The Company's president, Mr. Wang Xicheng and general manager Mr. Wang Feng together with all of their staff, hope to cooperate with everybody sincerely, create prosperity together, and welcome friends from everywhere to establish business.



CHINA TOP BRAND



CHINA FAMOUS TRADEMARK



GB/T28001-2001



ISO/TS16949:2002



ISO/TS16949:2002



ISO 14001:2004



ECE



DOT



FIVE FEATURE OF "LINGLONG"



1、 Through design and test again and again, Linglong tire is easier to control than normal tire because of short brake distance.



4、 LINGLONG tire has reinforced bead ,and the travel will be more safe and more reliable.



2、 Through improving compound and test repeatedly, tire has better wear resistance and the traveling period is raised 1/3 compared with normal tire.



5、 The maximum speed of LINGLONG tire can reaches 260km/h, travel with it will be same safe and comfortable on either high way or mountain road.



3、 LINGLONG tire with special pattern has good damping performance, and Its travel will be more smooth more comfortable with low noise.

Cross Section Of Radial Truck Tyre



Cross Section Of Radial Passenger Tyre



- National Credit-Standing and Good Faith Enterprise
- On the list of Top 20 World Tyre Producers
- On the list of Top 100 Chemical Enterprises of China
- On the list of the 1000 Biggest Industrial Enterprises of China



Explanation of Symbols

Tyre size
 Ply Rating
 Load Index
 Speed Index
 Standard Rim

Max. Load(kg)
 Inflation Pressure(kPa)
 Inflated Section Width(mm)

Overall Diameter, Inflated(mm)
 Pattern Depth (mm)
 Valve

RADIAL TRUCK TYRES



LLA01

Radial Truck Tyre

TYPICAL COMBINED PATTERN. SUITABLE FOR TRUCK OF DIFFERENT TONNAGE WHICH RIDING ON HIGHWAY AND COMMON ROAD. IT ALSO CAN RIDE ON BAD ROAD.

		⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
9.00R20	14	140/137	K	7.0	2575/2255	810/740	259	1018	15.5	
9.00R20	16	144/142	K	7.0	2800/2650	900/900	259	1018	15.5	
10.00R20	16	146/143	K	7.5	3000/2630	840/770	278	1053	17	
10.00R20	18	149/146	K	7.5	3250/3000	930/930	278	1053	17	
11.00R20	16	149/145	K	8.0	3270/2870	840/770	293	1085	17.5	
11.00R20	18	152/149	K	8.0	3550/3250	930/930	293	1085	17.5	
13R22.5	16	154/150	L	9.75	3750/3350	850/850	320	1124	17.5	
13R22.5	18	156/150	K	9.75	4000/3350	875/875	320	1124	17.5	



LLA08

Radial Truck Tyre

TYPICAL COMBINED PATTERN. SUITABLE FOR TRUCK OF DIFFERENT TONNAGE WHICH RIDING ON HIGHWAY AND COMMON ROAD.

		⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
7.50R16LT	14	122/118	M	6.00G	1495/1310	740/740	215	805	12.5	
8.25R16LT	14	128/126	K	6.50H	1800/1700	675/675	235	855	13.5	
7.50R20	14	130/125	K	6.0	1885/1655	840/770	215	935	13.5	
8.25R20	14	136/131	L	6.5	2205/1940	840/770	236	974	15.5	
9.00R20	14	140/137	K	7.0	2575/2255	810/740	259	1018	15.0	
9.00R20	16	144/142	K	7.0	2800/2650	900/900	259	1018	15.0	
10.00R20	16	146/143	K	7.5	3000/2630	840/770	278	1053	15.5	
10.00R20	18	149/146	K	7.5	3250/3000	930/930	278	1053	15.5	
11.00R20	16	149/145	K	8.0	3270/2870	840/770	293	1085	16.5	
11.00R20	18	152/149	K	8.0	3550/3250	930/930	293	1085	16.5	
12.00R20	18	154/149	K	8.5	3730/3270	840/770	315	1125	17.0	
315/80R22.5	18	154/150	M/L	9.00	3750/3350	825/825	312	1076	17.0	
315/80R22.5	20	156/150	L	9.00	4000/3350	850/850	312	1076	17.0	
12.00R24	18	156/153	K	8.5	4000/3650	775	313	1226	17.0	
11R22.5	14	144/142	K	8.25	2800/2650	720	279	1054	15.5	
11R22.5	16	146/143	K	8.25	3000/2725	830	279	1054	15.5	
11R24.5	14	146/143	K	8.25	3000/2725	720	279	1104	15.5	
11R24.5	16	149/146	K	8.25	3250/3000	830	279	1104	15.5	
11.00R22	16	152/149	K	8.00	3550/3250	830/830	293	1135	16.5	
12R22.5	14	146/143	K	9.00	3000/2725	720/720	300	1091	17	
12R22.5	16	150/147	K	9.00	3350/3075	830/830	300	1091	17	



LLA01A

Radial Truck Tyre

TYPICAL COMBINED PATTERN. SUITABLE FOR TRUCK OF DIFFERENT TONNAGE WHICH RIDING ON HIGHWAY AND COMMON ROAD. IT ALSO CAN RIDE ON BAD ROAD.

		⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
10.00R20	16	146/143	K	7.5	3000/2630	840/770	278	1053	17	
10.00R20	18	149/146	K	7.5	3250/3000	930/930	278	1053	17	



LLA18

Radial Truck Tyre

TYPICAL COMBINED PATTERN. SUITABLE FOR TRUCK OF DIFFERENT TONNAGE WHICH RIDING ON HIGHWAY AND COMMON ROAD. IT ALSO CAN RIDE ON BAD ROAD.

		⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
385/65R22.5	18	158	K	11.75	4250	850	389	1072	16.5	
385/65R22.5	20	160	J	11.75	4500	900	389	1072	16.5	



LLA38

Radial Truck Tyre

SUITABLE FOR THE DRIVEN SHAFT AND TRAILER AXLE OF THE HEAVY-DUTY LOAD-CARRYING VEHICLE RUNNING ON HIGH-GRADE HIGHWAY.

		⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
385/65R22.5	18	158	K	11.75	4250	850	389	1072	16.5	
385/65R22.5	20	160	J	11.75	4500	900	389	1072	16.5	
425/65R22.5	18	162	K	12.25	4750	760	422	1124	17.5	
425/65R22.5	20	165	J	13.00	5150	825	422	1124	17.5	
445/65R22.5	20	169	J	14.00	5800	900	444	1150	18.0	



LLA28

Radial Truck Tyre

TYPICAL COMBINED PATTERN. SUITABLE FOR TRUCK OF DIFFERENT TONNAGE WHICH RIDING ON HIGHWAY AND COMMON ROAD. IT ALSO CAN RIDE ON BAD ROAD.

		⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
425/65R22.5	18	162	K	12.25	4750	760	422	1124	17.5	
425/65R22.5	20	165	J	13.00	5150	825	422	1124	17.5	

RADIAL TRUCK TYRES



LLA58

Radial Truck Tyre

TYPICAL COMBINATION PATTERN, SUITABLE FOR THE WHOLE WHEEL ORDER OF THE GOODS STOCK RUNNING ON EXPRESSWAY AND ORDINARY ROAD.

11.00R20	16	149/145	L	8.0	3270/2870	840/770	293	1085	14.5
11.00R20	18	152/149	L	8.0	3550/3250	930/930	293	1085	14.5



LLD09

Radial Truck Tyre

SUITABLE FOR MIXED ROAD, AND ALSO SUITABLE FOR TRUCK WHEN RIDING WITH HIGH SPEED ON HIGHWAY FOR SHORT DISTANCE.

7.50R16LT	12	120/116	M	6.00G	1405/1240	670	215	805	13.5
7.50R16LT	14	122/118	M	6.00G	1495/1310	740	215	805	13.5
7.50R20	12	128/123	L	6.0	1775/1555	770/700	215	935	13.5
7.50R20	14	130/125	K	6.0	1885/1655	840/770	215	935	13.5
8.25R16LT	14	128/126	K	6.5CH	1800/1700	675/675	235	855	14.5
8.25R20	14	136/131	L	6.5	2205/1940	840/770	236	974	14.5
8.25R20	16	139/137	L	6.5	2430/2300	930	236	974	14.5
9.00R20	14	140/137	K	7.0	2575/2255	810/740	259	1018	15.5
9.00R20	16	144/142	K	7.0	2800/2650	900/900	259	1018	15.5
10.00R20	16	146/143	K	7.5	3000/2630	840/770	278	1053	16.0
10.00R20	18	149/146	K	7.5	3250/3000	930/930	278	1053	16.0
11.00R20	16	149/145	K	8.0	3270/2870	840/770	293	1085	16.5
11.00R20	18	152/149	K	8.0	3550/3250	930/930	293	1085	16.5



LLA78

Radial Truck Tyre

TYPICAL COMBINATION PATTERN, SUITABLE FOR THE WHOLE WHEEL ORDER OF THE GOODS STOCK RUNNING ON EXPRESSWAY AND ORDINARY ROAD.

235/75R17.5	12	130/128	M	6.75	1900/1800	725/725	233	797	13.0
235/75R17.5	14	132/130	L	6.75	2000/1900	775/775	233	797	13.0
235/75R17.5	16	141/140	J	6.75	2575/2500	850/850	233	797	13.0
235/75R17.5	18	143/141	J	6.75	2725/2575	875/875	233	797	13.0



LLD10

Radial Truck Tyre

SUITABLE FOR BAD AND MIXED ROAD.

9.00R20	14	140/137	F	7.0	2575/2255	810/740	259	1018	20.0
9.00R20	16	144/142	F	7.0	2800/2650	900/900	259	1018	20.0
10.00R20	16	146/143	J	7.5	3000/2630	840/770	278	1053	20.0
10.00R20	18	149/146	J	7.5	3250/3000	930	278	1053	20.0
11.00R20	16	149/145	F	8.0	3270/2870	840/770	293	1085	20.0
11.00R20	18	152/149	F	8.0	3550/3250	930/930	293	1085	20.0
12.00R20	18	154/149	F	8.5	3730/3270	840/770	315	1125	21.0



LLD01

Radial Truck Tyre

SUITABLE FOR MIXED ROAD, AND ALSO SUITABLE FOR TRUCK WHEN RIDING WITH HIGH SPEED ON HIGHWAY FOR SHORT DISTANCE.

315/80R22.5	18	154/150	M/L	9.00	3750/3350	825/825	312	1076	19.5
315/80R22.5	20	156/150	L	9.00	4000/3350	850/850	312	1076	19.5



LLD27

Radial Truck Tyre

SUITABLE FOR THE DRIVING WHEEL ORDER OF THE GOODS STOCK RUNNING ON EXPRESSWAY AND ORDINARY ROAD.

11R22.5	14	144/142	M	8.25	2800/2650	720	279	1060	16.5
11R22.5	16	146/143	L	8.25	3000/2725	830	279	1060	16.5
12R22.5	14	146/143	M	9.00	3000/2725	720/720	300	1091	17.5
12R22.5	16	150/147	M	9.00	3350/3075	830/830	300	1091	17.5



LINGLONG TYRE



LLD37 Radial Truck Tyre

SUITABLE FOR THE DRIVING WHEEL ORDER OF THE GOODS STOCK RUNNING ON EXPRESSWAY AND ORDINARY ROAD.

	1	2	3	4	5	6	7	8	9	10
11R22.5	14	144/142	M	8.25	2800/2650	720	279	1069	22.0	
11R22.5	16	146/143	M	8.25	3000/2725	830	279	1069	22.0	
11R24.5	14	146/143	M	8.25	3000/2725	720	279	1119	22.0	
11R24.5	16	149/146	M	8.25	3250/3000	830	279	1119	22.0	
295/75R22.5	14	144/141	M	9.00	2800/2575	760/760	298	1029	22.0	
295/75R22.5	16	146/143	M	9.00	3000/2725	830/830	298	1029	22.0	
285/75R24.5	14	144/141	M	8.25	2800/2575	760/760	283	1065	22.0	
285/75R24.5	16	147/144	M	8.25	3075/2800	830/830	283	1065	22.0	



LLF01 Radial Truck Tyre

SPECIAL FOR TRUCK OF DIFFERENT TONNAGE WHICH RIDING ON HIGHWAY. ALSO IT IS VERY STABLE AND SAFE WHEN RIDING ON WET AND SLIPPERY ROAD.

	1	2	3	4	5	6	7	8	9	10
11R22.5	14	144/142	M	8.25	2800/2650	720	279	1054	14.5	
11R22.5	16	146/143	M	8.25	3000/2725	830	279	1054	14.5	
295/80R22.5	14	150/146	M	9.00	3350/3000	800/800	298	1044	14.5	
295/80R22.5	16	152/148	M	9.00	3550/3150	850/850	298	1044	14.5	
11R22.5	16	148/144	M	8.25	6610/5800(LBS)	120/110(P.SI)	279	1054	14.5	
295/60R22.5	16	149/146	M	9.00	3250/3000	900	292	926	14.5	



LLF16 Radial Truck Tyre

SUITABLE FOR THE WHOLE WHEEL ORDER OF THE PASSENGER STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON THE HIGH GRADE ROAD.

	1	2	3	4	5	6	7	8	9	10
11R22.5	14	144/142	M	8.25	2800/2650	720	279	1054	14.5	
11R22.5	16	146/143	M	8.25	3000/2725	830	279	1054	14.5	
11R24.5	14	146/143	M	8.25	3000/2725	720	279	1104	14.5	
11R24.5	16	149/146	M	8.25	3250/3000	830	279	1104	14.5	
295/75R22.5	14	144/141	M	9.00	2800/2575	760/760	298	1014	14.5	
295/75R22.5	16	146/143	M	9.00	3000/2725	830/830	298	1014	14.5	
285/75R24.5	14	144/141	M	8.25	2800/2575	760/760	283	1050	14.5	
285/75R24.5	16	147/144	M	8.25	3075/2800	830/830	283	1050	14.5	



LLF02 Radial Truck Tyre

SPECIAL FOR TRUCK OF DIFFERENT TONNAGE WHICH RIDING ON HIGHWAY. ALSO IT IS VERY STABLE AND SAFE WHEN RIDING ON WET AND SLIPPERY ROAD.

	1	2	3	4	5	6	7	8	9	10
9.00R20	14	140/137	L	7.0	2575/2255	810/740	259	1018	14.0	
9.00R20	16	144/142	L	7.0	2800/2650	900/900	259	1018	14.0	
10.00R20	16	146/143	M	7.5	3000/2630	840/770	278	1053	15.5	
10.00R20	18	149/146	L	7.5	3250/3000	930/930	278	1053	15.5	
11.00R20	16	149/145	L	8.0	3270/2870	840/770	293	1085	15.5	
11.00R20	18	152/149	L	8.0	3550/3250	930/930	293	1085	15.5	
12.00R20	18	154/149	L	8.5	3730/3270	840/770	315	1125	16	
12R22.5	14	146/143	M	9.00	3000/2725	720/720	300	1085	14.5	
12R22.5	16	150/147	M	9.00	3350/3075	830/830	300	1085	14.5	
295/80R22.5	14	150/146	M	9.00	3350/3000	800/800	298	1044	14.5	
295/80R22.5	16	152/148	M	9.00	3550/3150	850/850	298	1044	14.5	
315/80R22.5	18	154/150	M/L	9.00	3750/3350	825/825	312	1076	14.5	
315/80R22.5	20	156/150	L	9.00	4000/3350	850/850	312	1076	14.5	
295/60R22.5	16	149/146	M	9.00	3250/3000	900	292	926	14.5	



F816 Radial Truck Tyre

SUITABLE FOR THE WHOLE WHEEL ORDER OF THE PASSENGER STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON THE HIGH GRADE ROAD.

	1	2	3	4	5	6	7	8	9	10
11R22.5	14	144/142	M	8.25	2800/2650	720	279	1054	14.5	
11R22.5	16	146/143	M	8.25	3000/2725	830	279	1054	14.5	
11R24.5	14	146/143	M	8.25	3000/2725	720	279	1104	14.5	
11R24.5	16	149/146	M	8.25	3250/3000	830	279	1104	14.5	
295/75R22.5	14	144/141	M	9.00	2800/2575	760/760	298	1014	14.5	
295/75R22.5	16	146/143	M	9.00	3000/2725	830/830	298	1014	14.5	
285/75R24.5	14	144/141	M	8.25	2800/2575	760/760	283	1050	14.5	
285/75R24.5	16	147/144	M	8.25	3075/2800	830/830	283	1050	14.5	

RADIAL TRUCK TYRES



LLF06

Radial Truck Tyre

SUITABLE FOR BUS OF DIFFERENT TONNAGE WHICH RIDING ON HIGHWAY AND DIRECTIVE WHEEL OF TRUCK.

	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘
9.00R20	14	140/137	L	7.0	2575/2255	810/740	259	1018	14.0						
9.00R20	16	144/142	K	7.0	2800/2650	900/900	259	1018	14.0						
10.00R20	16	146/143	L	7.5	3000/2630	840/770	278	1053	14.5						
10.00R20	18	149/146	K	7.5	3250/3000	930/930	278	1053	14.5						
11.00R20	16	149/145	K	8.0	3270/2870	840/770	293	1085	15.5						
11.00R20	18	152/149	K	8.0	3550/3250	930/930	293	1085	15.5						
12.00R20	18	154/149	K	8.5	3730/3270	840/770	315	1125	15.5						
11R22.5	14	144/142	M	8.25	2800/2650	720	279	1054	14.5						
11R22.5	16	146/143	M	8.25	3000/2725	830	279	1054	14.5						
11R22.5	16	148/144	M	8.25	6610/5800(LBS)	120/110(P.S.I)	279	1054	14.5						
315/30R22.5	18	154/150	M/L	9.00	3750/3350	825/825	312	1076	14.5						
315/30R22.5	20	156/150	L	9.00	4000/3350	850/850	312	1076	14.5						



LLF76

Radial Truck Tyre

SUITABLE FOR THE WHOLE WHEEL ORDER OF THE PASSENGER STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON THE HIGH GRADE ROAD.

	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘
8R22.5	10	124/122	M	6.00	1605/1405	670/600	203	935	13.0						
8R22.5	12	128/126	M	6.00	1775/1555	770/700	203	935	13.0						



LLF26

Radial Truck Tyre

SUITABLE FOR THE WHOLE WHEEL ORDER OF THE PASSENGER STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON THE HIGH GRADE ROAD.

	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘
7.50R16LT	12	120/116	M	6.00G	1405/1240	670	215	805	11.5						
7.50R16LT	14	122/118	M	6.00G	1495/1310	740	215	805	11.5						
7.50R20	12	128/123	L	6.0	1775/1555	770/700	215	935	11.5						
7.50R20	14	130/125	K	6.0	1885/1655	840/770	215	935	11.5						
8R19.5	12	124/122	M	6.00	1600/1500	760/760	203	859	12.5						
8.25R16LT	14	128/126	L	6.50H	1800/1700	675/675	235	855	12.5						
8.25R20	14	136/131	L	6.5	2205/1940	840/770	236	974	12.5						
8.25R20	16	139/137	L	6.5	2430/2300	930	236	974	12.5						
8.25R15TR	12	126/124	M	6.50	1700/1600	720	236	847	12.5						
8.25R15TR	14	129/127	L	6.50	1850/1750	830	236	847	12.5						
9.5R17.5	14	129/127	M	6.75	1850/1750	750	240	842	12						
9.5R17.5	18	143/141	M	6.75	2725/2575	875	240	842	12						



LLF86

Radial Truck Tyre

SUITABLE FOR THE WHOLE WHEEL ORDER OF THE PASSENGER STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON THE HIGH GRADE ROAD.

	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘
215/75R17.5	14	125/124	L	6.00	1700/1600	700/700	211	767	12.5						
215/75R17.5	16	135/133	J	6.00	2180/2060	850/850	211	767	12.5						



LLF56

Radial Truck Tyre

SUITABLE FOR ALL WHEELS OF LIGHT AND MIDDLE TRUCK RIDING IN HIGHWAY ROAD. GRADE ROAD.

	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘
9R22.5	12	133/131	M	6.75	2015/1770	740/670	229	974	13.5						
9R22.5	14	136/134	M	6.75	2205/1940	840/770	229	974	13.5						
10R22.5	12	138/136	M	7.50	2340/2050	700/630	254	1018	14.0						
10R22.5	14	141/139	M	7.50	2575/2255	810/740	254	1018	14.0						
10R22.5	14	144/142	L	7.50	2800/2650	850	254	1018	14.0						



LLF68

Radial Truck Tyre

SUITABLE FOR THE WHOLE WHEEL ORDER OF THE PASSENGER STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON THE HIGH GRADE ROAD.

	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘
10.00R20	16	146/143	L	7.5	3000/2630	840/770	278	1053	15.5						
10.00R20	18	149/146	L	7.5	3250/3000	930/930	278	1053	15.5						
11.00R20	16	149/145	L	8.0	3270/2870	840/770	293	1085	16.5						
11.00R20	18	152/149	L	8.0	3550/3250	930/930	293	1085	16.5						
12.00R20	18	154/149	L	8.5	3730/3270	840/770	315	1125	17.0						



LINGLONG TYRE



LLG28

Radial Truck Tyre

SUITABLE FOR THE WHOLE WHEEL ORDER OF THE PASSENGER STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON THE HIGH GRADE ROAD.

	10.00R20	10.00R20	11.00R20	11.00R20	12.00R20	16	146/143	K	7.5	3000/2630	840/770	278	1053	15.5
						18	149/146	K	7.5	3250/3000	930/930	278	1053	15.5
						16	149/145	K	8.0	3270/2870	840/770	293	1085	16.5
						18	152/149	K	8.0	3550/3250	930/930	293	1085	16.5
						18	154/149	K	8.5	3730/3270	840/770	315	1125	17.0



D915

Radial Truck Tyre

TYPICAL BLOCK PATTERN DESIGN SUITABLE FOR DRIVING WHEEL ORDER OF GOODS STOCK AND PASSENGERS RIDING IN HIGHWAY ROAD.

	295/60R22.5	315/60R22.5	16	149/146	M	9.00	3250/3000	900	298	926	17.5
			16	152/148	M	9.75	3550/3150	900	313	950	19.5



D935

Radial Truck Tyre

TYPICAL BLOCK PATTERN DESIGN SUITABLE FOR DRIVING WHEEL ORDER OF GOODS STOCK AND PASSENGERS RIDING IN HIGHWAY ROAD.

	10.00R20	10.00R20	16	146/143	L	7.5	3000/2630	840/770	278	1053	17.5
			18	149/146 <th>K</th> <th>7.5</th> <th>3250/3000</th> <th>930/930</th> <th>278</th> <th>1053</th> <th>17.5</th>	K	7.5	3250/3000	930/930	278	1053	17.5



D900

Radial Truck Tyre

SUITABLE ALL WHEELS OF THE LIGHT BUS AND GOODS STOCK RIDING IN HIGHWAY ROAD

	10.00R20	10.00R20	10.00R20	11.00R20	11.00R20	16	146/143	L	7.5	3000/2630	840/770	278	1053	17.5
						18	149/146 <th>K</th> <th>7.5</th> <th>3250/3000</th> <th>930/930</th> <th>278</th> <th>1053</th> <th>17.5</th>	K	7.5	3250/3000	930/930	278	1053	17.5
						16	149/145 <th>L</th> <th>8.0</th> <th>3270/2870</th> <th>840/770</th> <th>293</th> <th>1085</th> <th>17.5</th>	L	8.0	3270/2870	840/770	293	1085	17.5
						18	152/149 <th>L</th> <th>8.0</th> <th>3550/3250</th> <th>930/930</th> <th>293</th> <th>1085</th> <th>17.5</th>	L	8.0	3550/3250	930/930	293	1085	17.5



D928

Radial Truck Tyre

TYPICAL BLOCK PATTERN DESIGN SUITABLE FOR DRIVING WHEEL ORDER OF GOODS STOCK AND PASSENGERS RIDING IN HIGHWAY ROAD.

	10.00R20	10.00R20	11R22.5	11R22.5	11R24.5	11R24.5	11R24.5	295/75R22.5	295/75R22.5	285/75R22.5	285/75R22.5	16	146/143	L	7.5	3000/2630	840/770	278	1085	20
												18	149/146 <th>K</th> <th>7.5</th> <th>3250/3000</th> <th>930/930</th> <th>278</th> <th>1085</th> <th>20</th>	K	7.5	3250/3000	930/930	278	1085	20
												14	144/142 <th>L</th> <th>8.25</th> <th>2800/2650</th> <th>720</th> <th>279</th> <th>1054</th> <th>20.5</th>	L	8.25	2800/2650	720	279	1054	20.5
												16	146/143 <th>L</th> <th>8.25</th> <th>3000/2725</th> <th>830</th> <th>279</th> <th>1054</th> <th>20.5</th>	L	8.25	3000/2725	830	279	1054	20.5
												14	146/143 <th>L</th> <th>8.25</th> <th>3000/2725</th> <th>720</th> <th>279</th> <th>1104</th> <th>20.5</th>	L	8.25	3000/2725	720	279	1104	20.5
												16	149/146 <th>L</th> <th>8.25</th> <th>3250/3000</th> <th>830</th> <th>279</th> <th>1104</th> <th>20.5</th>	L	8.25	3250/3000	830	279	1104	20.5
												14	144/141 <th>M</th> <th>9.00</th> <th>2800/2575</th> <th>760/760</th> <th>298</th> <th>1029</th> <th>20.5</th>	M	9.00	2800/2575	760/760	298	1029	20.5
												16	146/143 <th>M</th> <th>9.00</th> <th>3000/2725</th> <th>830/830</th> <th>298</th> <th>1029</th> <th>20.5</th>	M	9.00	3000/2725	830/830	298	1029	20.5
												14	144/141 <th>M</th> <th>8.25</th> <th>2800/2575</th> <th>760/760</th> <th>283</th> <th>1065</th> <th>20.5</th>	M	8.25	2800/2575	760/760	283	1065	20.5
												16	147/144 <th>M</th> <th>8.25</th> <th>3075/2800</th> <th>830/830</th> <th>283</th> <th>1065</th> <th>20.5</th>	M	8.25	3075/2800	830/830	283	1065	20.5



D905

Radial Truck Tyre

TYPICAL BLOCK PATTERN DESIGN SUITABLE FOR DRIVING WHEEL ORDER OF GOODS STOCK AND PASSENGERS RIDING IN HIGHWAY ROAD.

	275/70R22.5	315/70R22.5	315/70R22.5	295/80R22.5	295/80R22.5	215/75R17.5	215/75R17.5	235/75R17.5	235/75R17.5	235/75R17.5	235/75R17.5	16	148/145	M	8.25	3150/2900	900/900	276	958	17.5
												14	152/148 <th>M</th> <th>9.00</th> <th>3550/3150</th> <th>850/850</th> <th>312</th> <th>1014</th> <th>17.5</th>	M	9.00	3550/3150	850/850	312	1014	17.5
												16	154/150 <th>M</th> <th>9.00</th> <th>3750/3350</th> <th>900/900</th> <th>312</th> <th>1014</th> <th>17.5</th>	M	9.00	3750/3350	900/900	312	1014	17.5
												14	150/146 <th>M</th> <th>9.00</th> <th>3350/3000</th> <th>800/800</th> <th>298</th> <th>1044</th> <th>17.5</th>	M	9.00	3350/3000	800/800	298	1044	17.5
												16	152/148 <th>M</th> <th>9.00</th> <th>3550/3150</th> <th>850/850</th> <th>298</th> <th>1044</th> <th>17.5</th>	M	9.00	3550/3150	850/850	298	1044	17.5
												14	126/124 <th>L</th> <th>6.00</th> <th>1700/1600</th> <th>700/700</th> <th>211</th> <th>767</th> <th>12.5</th>	L	6.00	1700/1600	700/700	211	767	12.5
												16	135/133 <th>L</th> <th>6.00</th> <th>2180/2060</th> <th>850/850</th> <th>211</th> <th>767</th> <th>12.5</th>	L	6.00	2180/2060	850/850	211	767	12.5
												12	130/128 <th>M</th> <th>6.75</th> <th>1900/1800</th> <th>725/725</th> <th>233</th> <th>797</th> <th>12.5</th>	M	6.75	1900/1800	725/725	233	797	12.5
												14	132/130 <th>L</th> <th>6.75</th> <th>2000/1900</th> <th>775/775</th> <th>233</th> <th>797</th> <th>12.5</th>	L	6.75	2000/1900	775/775	233	797	12.5
												16	141/140 <th>J</th> <th>6.75</th> <th>2575/2500</th> <th>850/850</th> <th>233</th> <th>797</th> <th>12.5</th>	J	6.75	2575/2500	850/850	233	797	12.5
												18	143/141 <th>J</th> <th>6.75</th> <th>2725/2575</th> <th>875/875</th> <th>233</th> <th>797</th> <th>12.5</th>	J	6.75	2725/2575	875/875	233	797	12.5



D950

Radial Truck Tyre

ON/OFF HIGHWAY DRIVE TYRE DEEP RIGID BLOCK TRACTION DESIGN CUT RESISTANT COMPOUND FOR LOGGING CONDITIONS WHERE HIGH TRACTION REQUIRED.

	11R24.5	11R24.5	14	146/143	F	8.25	3000/2725	720	279	1119	25.0
			16	149/146 <th>F</th> <th>8.25</th> <th>3250/3000</th> <th>830</th> <th>279</th> <th>1119</th> <th>25.0</th>	F	8.25	3250/3000	830	279	1119	25.0

RADIAL TRUCK TYRES



D955

Radial Truck Tyre

ON/OFF HIGHWAY DRICE TYRE DEEP RIGID BLOCK TRACTION DESIGN CUT RESISTANT COMPOUND FOR LOGGING CONDITIONS WHERE HIGH TRACTION REQUIRED.

7.00R16LT	12	115/111	M	5.50F	1220/1075	670/670	200	780	12.5	
7.00R16LT	14	117/116	L	5.50F	1285/1250	700/700	200	780	12.5	
7.50R16LT	14	122/118	M	6.00G	1495/1310	740/740	215	805	14.5	
8.25R16LT	14	128/126	K	6.50H	1800/1700	675/675	235	855	15.5	
11.00R20	18	152/149	K	8.0	3550/3270	930/930	293	1085	20.5	
11.00R20	16	149/145	K	8.0	3270/2870	840/770	293	1085	20.5	
12.00R20	18	154/149	K	8.0	3730/3270	840/770	315	1125	20	
225/70R19.5	12	125/123	M	6.75	1650/1550	660/620	226	811	14.5	
225/70R19.5	14	128/126	M	6.75	1800/1700	760/760	226	811	14.5	



D990

Radial Truck Tyre

SUITABLE FOR BAD AND MIXED ROAD.

14.00R20	18	160/157	F	10.00W	4500/4125	700	370	1238	21	
16.00R20	18	160/157	F	10.00W	4500/4125	700	370	1238	22.5	



F805

Radial Truck Tyre

SUITABLE FOR ALL WHEELS ORDER OF PASSENGERS STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON HIGH GRADE ROAD.

275/70R22.5	16	148/145	M	8.25	3150/2900	900/900	276	958	14.5	
315/70R22.5	14	152/148	M	9.00	3550/3150	850/850	312	1014	14.5	
315/70R22.5	16	154/150	M	9.00	3750/3350	900/900	312	1014	14.5	



D960

Radial Truck Tyre

TYPICAL BLOCK PATTERN DESIGN SUITABLE FOR DRIVING WHEEL ORDER OF GOODS STOCK AND PASSENGERS RIDING IN HIGHWAY ROAD.

11.00R20	16	149/145	K	8.0	3270/2870	840/770	293	1085	21.0	
11.00R20	18	152/149	k	8.0	3550/3250	930/930	293	1085	21.0	
13R22.5	16	154/150	L	9.75	3750/3350	850/850	320	1124	20.5	
13R22.5	18	156/150	K	9.75	4000/3350	875/875	320	1124	20.5	
12.00R20	18	154/149	K	8.5	3730/3270	840/770	315	1125	21.0	
12.00R24	18	156/153	K	8.5	4000/3650	775	313	1226	21.0	
315/80R22.5	18	154/150	M/L	9.0	3750/3350	825/825	312	1076	21.0	
315/80R22.5	20	156/150	L	9.0	4000/3350	850/850	312	1076	21.0	



F815

Radial Truck Tyre

SUITABLE FOR ALL WHEELS ORDER OF PASSENGERS STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON HIGH GRADE ROAD.

6.50R16LT	10	107/102	M	5.50F	2550/1895	560/560	185	750	14.5	



D965

Radial Truck Tyre

TYPICAL BLOCK PATTERN DESIGN SUITABLE FOR DRIVING WHEEL ORDER OF GOODS STOCK AND PASSENGERS RIDING IN HIGHWAY ROAD.

11.00R20	16	149/145	L	8.0	3270/2870	840/770	293	1085	18	
11.00R20	18	152/149	L	8.0	3550/3250	930/930	293	1085	18	



A968

Radial Truck Tyre

TYPICAL BLOCK PATTERN DESIGN SUITABLE FOR DRIVING WHEEL ORDER OF GOODS STOCK AND PASSENGERS RIDING IN HIGHWAY ROAD.

11R22.5	14	144/142	L	8.25	2800/2650	720/720	279	1054	17.5	
11R22.5	16	146/143	K	8.25	3000/2725	830/830	279	1054	17.5	
11R24.5	14	146/143	L	8.25	3000/2725	720/720	279	1104	17.5	
11R24.5	16	149/146	K	8.25	3250/3000	830/830	279	1104	17.5	
11R17.5	12	131/131	F	8.25	2060/1950	620	278	927	17.5	
11R17.5	14	137/135	G	8.25	2300/2180	720	278	927	17.5	
11R17.5	16	141/139	H	8.25	2575/2430	830	278	927	17.5	
10.00R15TR	12	133/131	F	7.50	2060/1950	620	279	927	17.5	
10.00R15TR	14	137/135	G	7.50	2300/2180	720	279	927	17.5	
10.00R15TR	16	141/139	H	7.50	2575/2430	830	279	927	17.5	



LINGLONG TYRE



F820

Radial Truck Tyre

SUITABLE FOR ALL WHEELS ORDER OF PASSENGERS STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON HIGH GRADE ROAD.

225/70R19.5	12	125/123	M	6.75	1650/1550	660/660	226	811	12.5
225/70R19.5	14	128/126	M	6.75	1800/1700	760/760	226	811	12.5
245/70R19.5	12	129/127	M	7.5	1850/1750	660/660	248	839	13.0
245/70R19.5	14	133/131	M	7.5	2060/1950	760/760	248	839	13.0
265/70R19.5	14	136/134	M	7.50	2240/2120	725/725	262	867	13.5
265/70R19.5	16	140/138	L	7.50	2500/2360	775/775	262	867	13.5
255/70R22.5	14	136/133	M	7.50	2240/2060	700/700	255	930	14.0
255/70R22.5	16	140/137	M	7.50	2500/2300	800/800	255	930	14.0
275/70R22.5	16	148/145	M	8.25	3150/2900	900/900	276	958	14.5



F830

Radial Truck Tyre

SUITABLE FOR ALL WHEELS ORDER OF PASSENGERS STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON HIGH GRADE ROAD.

7.00R16LT	12	115/111	M	5.50F	1220/1075	670/670	200	775	10.5
7.00R16LT	14	117/116	L	5.50F	1285/1250	700/700	200	775	10.5



F835

Radial Truck Tyre

SUITABLE FOR ALL WHEELS ORDER OF PASSENGERS STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON HIGH GRADE ROAD.

LT235/65R16	14	126/123	L	6.1/2J	1700/1550	750/750	235	806	9.4



F825

Radial Truck Tyre

SUITABLE FOR ALL WHEELS ORDER OF PASSENGERS STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON HIGH GRADE ROAD.

7.50R16LT	14	122/118	M	6.00G	1495/1310	740/740	215	805	12.0



S850

Radial Truck Tyre

SPECIAL DESIGN FOR ALL WHEELS ORDER OF PASSENGERS AND GOODS STOCK AND GOOD FOR SIDE WEAR.

10.00R20	16	146/143	K	7.5	3000/2630	840/770	278	1053	15.5
10.00R20	18	149/146	K	7.5	3250/3000	930/930	278	1053	15.5



F828

Radial Truck Tyre

SUITABLE FOR ALL WHEELS ORDER OF PASSENGERS STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON HIGH GRADE ROAD.

11.00R20	16	149/145	L	8.0	3270/2870	840/770	293	1085	16
11.00R20	18	152/149	L	8.0	3550/3250	930/930	293	1085	16



F860

Radial Truck Tyre

SPECIAL DESIGN FOR ALL WHEELS ORDER OF PASSENGERS AND GOODS STOCK AND GOOD FOR SIDE WEAR.

11.00R20	16	149/145	L	8.0	3270/2870	840/770	293	1085	15.5
11.00R20	18	152/149	L	8.0	3550/3250	930/930	293	1085	15.5
11.00R22	16	152/149	K	8.00	3550/3250	830/830	312	1076	15

RADIAL OTR TYRES



T810

Radial Truck Tyre

SUITABLE FOR THE WHOLE WHEEL ORDER OF THE PASSENGER STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON THE HIGH GRADE ROAD.

Size	Width	Height	Load Index	Speed	Rolling Resistance	Wear	Water	Temperature	Stability	Comfort
11R22.5	14	144/142	M	8.25	2800/2650	720/720	270	1040	10.75	
11R22.5	16	146/143	M	8.25	3000/2725	830/830	270	1040	10.75	
11R24.5	14	146/143	M	8.25	3000/2725	720/720	270	1091	10.75	
11R24.5	16	149/146	M	8.25	3250/3000	830/830	270	1091	10.75	
255/70R22.5	16	140/137	M	7.50	2500/2300	800/800	225	930	10.5	
295/75R22.5	14	144/141	M	9.00	2800/2575	760/760	288	1002.5	11.0	
295/75R22.5	16	146/143	M	9.00	3000/2725	830/830	288	1002.5	11.0	
285/75R24.5	14	144/141	M	8.25	2800/2575	760/760	273	1041.5	11.0	
285/75R24.5	16	147/144	M	8.25	3075/2800	830/830	273	1041.5	11.0	



LM01N

OTR Radial

EXCEPTIONAL TRACTION AND MANEUVERABILITY GOOD FLOTATION AND EXCELLENT STABILITYEXCEPTIONAL RIDING COMFORT.

Size	Width	Height	Load Index	Speed	Rolling Resistance	Wear	Water	Temperature	Stability	Comfort
23.5R25	☆☆	19.5/2.5	14500	575	590	1600	31.5			



LB01N

OTR Radial

EXCEPTIONAL TRACTION AND MANEUVERABILITY GOOD FLOTATION AND EXCELLENT STABILITYEXCEPTIONAL RIDING COMFORT.

Size	Width	Height	Load Index	Speed	Rolling Resistance	Wear	Water	Temperature	Stability	Comfort
17.5R25	☆☆	14.00/1.5	8500	575	430	1330	28.0			
20.5R25	☆☆	17.00/2.0	11500	575	510	1476	31.0			
26.5R25	☆☆	22.00/3.0	18500	575	662	1730	37.0			
29.5R25	☆☆	25.00/3.5	22400	575	724	1873	40.0			



T820

Radial Truck Tyre

SUITABLE FOR THE WHOLE WHEEL ORDER OF THE PASSENGER STOCK AND THE GUIDING AXLE AND TRAILER AXLE OF THE GOODS STOCK RUNNING ON THE HIGH GRADE ROAD.

Size	Width	Height	Load Index	Speed	Rolling Resistance	Wear	Water	Temperature	Stability	Comfort
445/45R19.5	156	J	15.00	4000	900	446	895	15.5		



LB02S

OTR Radial

EXCEPTIONAL TRACTION AND MANEUVERABILITY GOOD FLOTATION AND EXCELLENT STABILITYEXCEPTIONAL RIDING COMFORT.

Size	Width	Height	Load Index	Speed	Rolling Resistance	Wear	Water	Temperature	Stability	Comfort
18.00R33	☆☆	13.00/2.5	18500	800	493	1856	47.0			



T830

Radial Truck Tyre

TYPICAL COMBINED PATTERN. SUITABLE FOR TRUCK OF DIFFERENT TONNAGE WHICH RIDING ON HIGHWAY AND COMMON ROAD. IT ALSO CAN RIDE ON BAD ROAD.

Size	Width	Height	Load Index	Speed	Rolling Resistance	Wear	Water	Temperature	Stability	Comfort
385/55R22.5	18	158	L	12.25	4250	850	386	996	15.5	
385/55R22.5	20	160	J	12.25	4500	900	386	996	15.5	



LB03S

OTR Radial

EXCEPTIONAL TRACTION AND MANEUVERABILITY GOOD FLOTATION AND EXCELLENT STABILITYEXCEPTIONAL RIDING COMFORT.

Size	Width	Height	Load Index	Speed	Rolling Resistance	Wear	Water	Temperature	Stability	Comfort
16.00R25	☆☆	11.25/2.0	12150	800	412	1525	43.0			
18.00R25	☆☆	13.00/2.5	16000	800	493	1654	47.0			



ULTRA HIGH PERFORMANCE & WINTER TYRES



L688

Ultra high performance

GOOD DRAINAGE. SUPREME HIGH SPEED CAPACITY. HIGH LATERAL SKID PREVENTION CAPACITY. WEAR RESISTANCE FOR LONG LIFE USE. GOOD HANDING STABILITY AND TRACTION THAT

Icon 1	Icon 2	Icon 3	Icon 4	Icon 5	Icon 6	Icon 7	Icon 8	Icon 9
205/50ZR16	91W XL	6/J	615	290	214	612	8.1	
225/50ZR16	92WXL	7J	630	250	233	632	8.1	
205/55ZR16	94W XL	6/J	670	290	215	632	8.1	
215/55ZR16	97W XL	7J	730	290	226	642	8.1	
205/40ZR17	84W XL	7/J	500	290	212	596	8.1	
205/50ZR17	93W XL	6/J	650	290	214	638	8.1	
215/40ZR17	87W XL	7/J	545	290	218	604	8.1	
215/45ZR17	91W XL	7/J	615	290	213	626	8.1	
225/45ZR17	94W XL	7/J	670	290	225	634	8.1	
235/45ZR17	97W XL	8J	730	290	236	644	8.1	
245/45ZR17	95WXL	8J	690	250	243	652	8.1	
215/35ZR18	84Y XL	7/J	500	290	218	607	8.1	
265/35ZR18	97Y XL	9/J	730	290	271	643	8.1	
215/40ZR18	89W XL	7/J	580	290	218	629	8.1	
225/40ZR18	92W XL	8J	630	290	230	637	8.1	
235/40ZR18	95W XL	8/J	690	290	241	645	8.1	
245/40ZR18	97W XL	8/J	730	290	248	653	8.1	
245/45ZR18	100WXL	8J	800	290	243	677	8.1	
255/45ZR18	103W XL	8/J	875	290	255	687	8.1	
235/50ZR18	97WXL	7/J	730	250	245	693	8.1	
245/35ZR19	93Y XL	8/J	650	290	248	655	8.1	
225/35ZR20	90Y XL	8J	600	290	230	666	8.1	
245/35ZR20	95Y XL	8/J	690	290	248	680	8.1	
255/35ZR20	97Y XL	9J	730	290	260	686	8.1	



L689

High performance SUV

EXCELLENT TRACTION. SKID PREVENTION ON WET ROAD. ROBUST CONSTRUCTION TO IMPROVE BEAD AREA DURABILITY.

Icon 1	Icon 2	Icon 3	Icon 4	Icon 5	Icon 6	Icon 7	Icon 8	Icon 9
275/30R20	97XL	W	91/2J	730	290	290	674	8.8
275/40R20	106XL	V	91/2J	950	290	278	728	8.8
275/45R20	110XL	V	9J	1060	290	273	756	8.8
275/55R20	117XL	V	81/2J	1285	290	284	810	8.8
285/30R20	99XL	W	10J	775	290	290	680	8.8
285/45R20	116XL	V	9J	1250	290	297	794	8.8
255/30R22	95XL	W	9J	690	290	260	713	8.8
265/35R22	102XL	V	91/2J	850	290	271	745	8.8
305/40R22	114XL	V	11J	1180	290	313	803	8.8
305/45R22	118XL	V	10J	1320	290	303	833	8.8
255/30R24	97XL	W	9J	730	290	260	764	8.8
275/25R24	95XL	W	10J	690	290	283	748	8.8
305/35R24	112XL	V	11J	1120	290	313	824	8.8
295/30R26	105XL	W	101/2J	975	290	301	838	8.8
305/30R26	107XL	W	11J	1030	290	313	844	8.8



R650 WINTER



Radial tyres for passenger car

THE TREAD DESIGN INCREASES THE EFFECT OF SNOW PILAR AND THE BREAK CAPABILITY WHEN DRICE ON THE SNOW

Icon 1	Icon 2	Icon 3	Icon 4	Icon 5	Icon 6	Icon 7	Icon 8	Icon 9
155/65R14	75	T	4/J	387	300	157	558	8.6
155/70R13	75	T	4/J	387	300	157	548	8.6
155/80R13	79	T	4/J	437	300	157	578	8.6
165/65R13	77	T	5J	412	300	170	544	8.6
165/65R14	79	T	5J	437	300	170	570	8.6
165/70R13	79	T	5J	437	300	170	562	8.6
165/70R14	81	T	5J	462	300	170	588	8.6
175/60R15	81	H	5J	462	300	177	591	8.6
175/65R14	82	T	5J	475	300	177	584	8.6
175/65R15	84	T	5J	500	300	177	609	8.6
175/70R13	82	T	5J	475	300	177	576	8.6
175/70R14	84	T	5J	500	300	177	602	8.6
175/80R14	88	T	5J	560	300	177	636	8.6
185/55R15	86	H XL	6J	530	340	194	585	8.6
185/60R14	82	T	5/J	475	300	189	578	8.6
185/60R15	88	H XL	5/J	560	340	189	603	8.6
185/65R15	88	T	5/J	560	300	189	621	8.6
185/70R14	88	T	5/J	560	300	189	616	8.6
195/55R15	85	H	6J	515	300	201	595	8.6
195/60R15	88	H	6J	560	300	201	615	9.0
195/65R15	91	H/T	6J	615	300	201	635	9.0
205/55R16	91	H	6/J	615	300	214	632	9.0
205/60R15	95	H XL	6J	690	340	209	627	9.0
205/65R15	94	H	6J	670	300	209	647	9.0
215/55R16	93	H	7J	650	300	226	642	9.0



RADIAL656 WINTER



Radial tyres for passenger car

THE NON-REGULATED SPILE DESIGNED ON THE WHOLE CIRCUMFERENCE OF THE PATTERN CAN ENHANCE THE TRACTION ABILITY ON THE ICY GROUND.

Icon 1	Icon 2	Icon 3	Icon 4	Icon 5	Icon 6	Icon 7	Icon 8	Icon 9
195/65R15	91	H/L	6J	615	250	201	635	9.0

PASSENGER CAR TYRES



RADIAL620

Radial tyres for passenger car

EXCELLENT TRACTION. SKID PREVENTION ON WET ROAD. ROBUST CONSTRUCTION TO IMPROVE BEAD AREA DURABILITY.

215/70R16	100	T	6 1/2J	800	300	221	708	10.5
265/70R15	112	H	8J	1120	300	272	753	10.5
235/70R16	106	T	7J	950	300	240	736	10.5
245/70R16	107	H	7J	975	300	248	750	10.5
265/70R16	112	H	8J	1120	300	272	778	10.5
215/65R16	98	H	6 1/2J	750	300	221	686	10.5
205/70R15	96	H	6J	710	300	209	669	10.5
235/65R17	108	H	7J	1000	350	240	738	10.5
275/55R17	109	V	8 1/2J	1030	300	284	734	10.5
205/80R16	104	T	5 1/2J	900	280	203	734	10.5



RADIAL600

Radial passenger tyre

EXCELLENT TRACTION. SKID PREVENTION ON WET ROAD. ROBUST CONSTRUCTION TO IMPROVE BEAD AREA DURABILITY.

195/65R15	91	H	6J	615	250	201	635	8.0
205/65R15	94	H	6J	670	250	209	647	8.0
P215/65R15	96	H	6 1/2J	710	250	221	661	8.0



RADIAL616

Radial tyres for passenger car

HIGH MILEAGE AND WEAR RESISTANCE. GOOD HANDLING AND ROAD HOLDING AT HIGHSPEED. EXCELLENT TRACTION WHILE RUNNING ON SNOW AND ICE. HIGH PERFORMANCE TYRE WITH CROSSCOUNTRY PATTERN SUITE TO ALL TERRAIN.

30x9.50R15LT	104	Q	7 1/2J	900	350	240	750	11.5
31x10.50R15LT	109	Q	8 1/2J	1030	350	268	775	11.5



RADIAL618

Radial tyres for passenger car

EXCELLENT TRACTION. SKID PREVENTION ON WET ROAD. ROBUST CONSTRUCTION TO IMPROVE BEAD AREA DURABILITY.

185/60R14	82	H	5 1/2J	475	250	189	578	8.2
185/55R14	80	H	6J	450	250	194	560	8.2
195/55R15	85	H	6J	515	250	201	595	8.2
225/60R16	98	H	6 1/2J	750	250	228	676	8.2
195/60R15	88	H	6J	560	250	201	615	8.2
205/55R15	88	H	6 1/2J	560	250	214	607	8.2
215/60R16	95	H	6 1/2J	690	250	221	664	8.2



LINGLONG TYRE



RADIAL619

Radial tyres for passenger car

THE PATTERN HAVE THE STRONG GRIPPAGE , INCREASE THE CAPABILITY OF SWERVE WHEN IT IS HIGH SPEED LOW NOISE.

195/65R15	91	H	6J	615	250	201	635	8.2



LMA2

Radial tyres for passenger car

EXCELLENT DRAINAGE AND TRACTION SUITE TO ALL WEATHER USE.

185/60R14	82	H	5 1/2 J	475	250	189	578	8.0



GL699

Radial tyres for passenger car

SINGLE GUIDING HIGH-SPEED MOBILE PATTERN. ENDURABLE. HIGH SPEED, STABLE, COMFORTABLE AND THE SPEED PER HOUR UP TO ABOVE 240KM/H.

195/50R15	82	V	6J	475	250	201	577	8.0



LMA3

Radial tyres for passenger car

WIDE CIRCULAR GROVES THAT DISPOL WATER AWAY AT HIGH SPEED.

185/70R14	88	H	5 1/2 J	560	250	189	616	8.0
185/70R14	92	H	5 1/2 J	630	290	189	616	8.0



RADIAL660

Radial tyres for passenger car

HIGH MILEAGE AND WEAR RESISTANCE. GOOD HANDLING AND ROAD HOLDING AT HIGHSPEED. EXCELLENT TRACTION WHILE RUNNING ON SNOW AND ICE. HIGH PERFORMANCE TYRE WITH CROSSCOUNTRY PATTERN SUITE TO ALL TERRAIN.

P225/75R15	102	S	6J	850	250	223	719	10.5



LMA7

Radial tyres for passenger car

HAVINT LARGE INCLINABLE CROSSWISE CANNELURE,TURNING OVER EASILY AND LOW NOISE.

185/65R14	86	H	5 1/2 J	530	250	189	596	8.0



LMA1

Radial tyres for passenger car

GOOD DRAINAGE.SUPREME HIGH SPEED CAPACITY. HIGH LATERAL SKID PREVENTION CAPACITY. WEAR RESISTANCE FOR LONG LIFE USE. GOOD HANDING STABILITY AND TRACITION THAT CAN BE USED ON AND OFF ROAD.

165/70R14	81	T	5.00B	462	250	170	588	8.0
165/70R13	83	S	5.00B	487	300	170	562	7.8
165/70R13	79	T	5.00B	437	250	170	562	7.8
165/70R13C	88/86	S	5.00B	550	375	170	562	7.8
165/70R13LT	92/90	N	5.00B	550	450	170	562	7.8



LMA8

Radial tyres for passenger car

GOOD DRAINAGE.SUPREME HIGH SPEED CAPACITY.HIGH LATERAL SKID PREVENTION CAPACITY WEAR RESISTANCE FOR LONG LIFE USE.GOOD HANDING STABILITY AND TRACITION THAT CAN BE USED ON AND OFF ROAD.

175/70R13	82	T	5.00B	475	250	177	576	8.0

PASSENGER CAR TYRES



LMA9

Radial tyres for passenger car

WITH HIGH SPEED ABILITY, GOOD HANDING AND STABILITY, SUITE TO ALL WEATHER.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
145/70R12	69	S	4.50B	325	250	150	509	8.0	
155/70R13	75	T	4.50B	387	250	157	548	8.0	
165/65R13	77	H	5.00B	412	250	170	544	8.0	



LMA18

Radial tyres for passenger car

THE HIGH-SPEED COMFORTABLE CAR TYRE PATTERN WITH QUICK RESPONSE, SENSITIVE CONTROL, HIGH SPEED, GOOD PERFORMANCE, COMFORTABLE RIDING AND LOW NOISE.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
155/65R13	73	H	4.50B	365	250	157	532	8.0	
165/65R14	79	T/H	5J	437	250	170	570	8.0	
175/65R13	80	H	5.00B	450	250	177	558	8.0	
175/65R14	82	H	5J	475	250	177	584	8.0	
195/60R14	86	H	6J	530	250	201	590	8.2	



LMA15

Radial tyres for passenger car

GOOD DRAINAGE. SUPREME HIGH SPEED CAPACITY. HIGH LATERAL SKID PREVENTION CAPACITY. WEAR RESISTANCE FOR LONG LIFE USE. GOOD HANDING STABILITY AND TRACTION THAT CAN BE USED ON AND OFF ROAD.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
165/60R14	75	H	5.00B	387	250	170	554	8.0	



LMB3

Radial tyres for passenger car

SUITABLE FOR ALL TERRAIN. HIGH MILEAGE WITH WEAR RESISTANCE.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
P215/75R15	100	S	6J	790	250	216	703	9.5	
P235/75R15	105	S	6 1/2 J	920	250	235	733	10.0	



LMA16

Radial tyres for passenger car

GOOD DRAINAGE. SUPREME HIGH SPEED CAPACITY. HIGH LATERAL SKID PREVENTION CAPACITY. WEAR RESISTANCE FOR LONG LIFE USE. GOOD HANDING STABILITY AND TRACTION THAT CAN BE USED ON AND OFF ROAD.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
175/70R14	84	T	5J	500	250	177	602	8.0	
175/70R14LT	95/93	S	5J	S800 D3000 S1775	375	177	602	8.0	
175/70R14LT	99/98	S	5J	D7750	450	177	618	8.0	



LL700

Radial tyres for passenger car

THE LONGITUDINAL PROFILED PRINCIPAL GROOVE AND CROSSWISE HEAT DISSIPATION STEEL STRAP TO BRING THE FASTER HEAT DISSIPATION TO THE TYRE AND DESTROY THE WATER FILM TO INCREASE THE MOISTURE-RESISTANCE OF THE TYRE. BIG SURFACE CONTACT BETWEEN THE PATTERN AND THE GROUND ENSURES THE STABLE IMPRESSION ON BOTH DRY AND WET GROUND AND THE WEARING MORE UNIFORM.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
175/70R13	82	T	5.00B	475	300	171	576	8.1	
175/70R14	84	T	5J	500	300	171	602	8.1	
185/70R13	86	T	5 1/2 J	530	300	189	590	8.1	
185/70R14	88	T	5 1/2 J	560	300	189	616	8.1	
195/70R14	91	T	6J	615	300	201	630	8.1	
205/70R14	94	T	6J	670	300	209	644	8.1	
205/70R15	96	T	6J	710	300	209	669	8.2	
215/70R14	96	T	6 1/2 J	710	300	221	658	8.2	
215/70R15	98	T	6 1/2 J	750	300	221	683	8.2	



LMB2

Radial tyres for passenger car

HIGH MILEAGE AND WEAR RESISTANCE. GOOD HANDLING AND ROAD HOLDING AT HIGH SPEED. EXCELLENT TRACTION WHILE RUNNING ON SNOW AND ICE. HIGH PERFORMANCE TYRE WITH CROSS-COUNTRY PATTERN SUITE TO ALL TERRAIN.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
P225/75R15	102	S	6J	850	240	223	719	10.5	



LINGLONG TYRE LIGHT TRUCK TYRES



LMC1

Metric Series Radial Light Truck Tyres

HIGH HALL LAGE. EXCELLENT TRACTON ON SNOW AND ICE. EVEN TREADWEAR.

155R12C	83/81	6	N	4.50B	D462 S487	350	157	550	8.0



LMC4

Conventional Section Radial Light Truck Tyres

SUITABLE FOR ALL TERRAIN. HIGH MILEAGE WITH WEAR RESISTANCE.

6.50R16C	10	108/107	L	5.50F	D975 S1006	500	176	742	11.5
7.00R15LT	10	110/105	L	5.50F	D915 S1040	560	200	750	11.5
7.50R16LT	10	116/112	L	6.00G	D1280 S1320	560	215	805	11.5
7.50R16LT	14	122/118	L	6.00G	D1380 S1380	770	215	805	11.5



LMC2

Metric Series Radial Light Truck Tyres

EXCELLENT TRACTION. SKID PREVENTION ON WET ROAD. ROBUST CONSTRUCTION TO IMPROVE BEAD AREA DURABILITY.

195/75R14C	8	106/104	N	5 1/2 J	D900 S950	475	196	648	10.0



LMC5

Metric Series Radial Light Truck Tyres

GOOD HANDLING STABILITY. EXCELLENT TRACTION AND LATERAL SKID PREVENTION. GOOD DRAINAGE WITH OPEN DESIGNED PATTERN. SUITABLE FOR ALL TERRAIN ESPECIALLY FOR CORSSING COUNTRY.

185R14C	8	102/100	Q	5 1/2 J	D800 S850	450	188	650	10.5
195R14C	8	106/104	P	5 1/2 J	D890 S935	450	198	666	10.5



LMC3

Metric Series Radial Light Truck Tyres

HEAVILY BLOCKED AND OPEN PATTERN. DESIGN FOR OFF AND ON ROAD USE. ENSURE HIGH PERFORMANCE EVEN AT HIGH SPEED. GOOD HANDING STABILITY AND HIGH HANDLAGE WITH PARTICULAR STRENGTH IN THE SHOULDER AREA.

215R16LT	8	113/111	N	6J	D1090 S1150	450	218	750	10.5



LMC6

Conventional Section Radial Light Truck Tyres

SUITABLE FOR ALL TERRAIN. HIGH MILEAGE WITH WEAR RESISTANCE.

LT235/85R16	10	N	6 1/2 J	D1260 S1380	550	235	805	12.0	

LIGHT TRUCK TYRES



LMC7

Conventional Section Radial Light Truck Tyres

SUITABLE FOR ALL TERRAIN. HIGH MILEAGE WITH WEAR RESISTANCE.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
195R15C	8	106/104	Q	5 1/2 J	D900 S950	450	198	690	10.0	
195R15C(White)	8	106/104	Q	5 1/2 J	D900 S950	450	198	690	10.0	



L780

Metric Series Radial Light Truck Tyres

GOOD HANDLING STABILITY. EXCELLENT TRACTION AND LATERAL SKID PREVENTION. GOOD DRAINAGE WITH OPEN DESIGNED PATTERN. SUITABLE FOR ALL TERRAIN ESPECIALLY FOR CORSSING COUNTRY.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
LT215/85R16	115/112	Q	6 J	S:1215 D:1120	550	216	772	11.1		
LT235/85R16	120/116	Q	6 1/2 J	S:1380 D:1260	550	235	806	11.1		
LT235/85R16	126/123	Q	6 1/2 J	S:1700 D:1550	750	235	806	11.1		
LT225/75R16	115/112	Q	6 J	S:1215 D:1120	550	223	744	11.1		
LT245/75R16	120/116	Q	7 J	S:1380 D:1260	550	248	774	11.1		
LT265/75R16	123/120	Q	7 1/2 J	S:1550 D:1400	550	267	804	11.1		
LT235/80R16	118/115	Q	6 1/2 J	S:1320 D:1215	550	235	782	11.1		
LT235/80R16	122/119	Q	6 1/2 J	S:1500 D:1360	650	235	782	11.1		
7.50R16LT	122/118	Q	6K	D:1510 S:1440	724	215	805	11.1		
P235/75R15	105	S	6 1/2 J	920	300	235	733	9.5		
31x10.50R15LT	109	Q	8 1/2 J	1030	350	268	775	11.1		



LMC8

Conventional Section Radial Light Truck Tyres

THE SUPER STRENGTH PHYSICAL DESIGN, SHOCKPROOF AND WEAR RESISTANCE, WITH GOOD TURNING AND ROAD-SURFACE CONTROL ABILITY.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
195R14C(WHITE)	6	102/100S	5 1/2 J	D800 S850	375	198	666	9.5		
195R14C(WHITE)	8	106/104P	5 1/2 J	D900 S950	450	198	666	9.5		
195R14C(BLACK)	8	106/104P	5 1/2 J	D900 S950	450	198	666	9.5		
205R14C(BLACK)	8	109/107R	6J	D975 S1030	450	208	686	9.5		



L621

Conventional Section Radial Light Truck Tyres

SUITABLE FOR ALL TERRAIN. HIGH MILEAGE WITH WEAR RESISTANCE.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
155/80R13	79	T	4.50B	437	300	157	578	8		



LMC9

Metric Series Radial Light Truck Tyres

SINGLE GUIDING HIGH-SPEED MOBILE PATTERN, ENDURABLE, HIGH SPEED, STABLE, COMFORTABLE AND THE SPEED PER HOUR UP TO ABOVE 240KM/H.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
165R13C	6	91/89	N	4.50B	D560 S585	350	167	598	8.0	
165R13C	8	94/92	N	4.50B	D630 S670	450	167	598	8.0	
165R13C	8	94/92	R	4.50B	D630 S670	450	167	598	8.0	



R655

Conventional Section Radial Light Truck Tyres

SUITABLE FOR ALL TERRAIN. HIGH MILEAGE WITH WEAR RESISTANCE.

	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
5.00R12LT	8	83/81	N	3.50B	D462 S487	450	135	571	8	



LINGLONG TYRE



LL850

Conventional Section Radial Light Truck Tyres

THE SUPER STRENGTH PHYSICAL DESIGN, SHOCKPROOF AND WEAR RESISTANCE, WITH GOOD TURNING AND ROAD-SURFACE CONTROL ABILITY.

LT245/75R16	120/116	Q	7 J	D:1260 S:1380	550	248	774	14	
LT265/75R16	123/120	Q	7 1/2 J	D:1400 S:1550	550	267	804	15	
LT235/65R16	120/116	Q	6 1/2 J	D:1260 S:1380	550	235	806	14	
LT265/70R17	121/118	Q	8 J	D:1320 S:1450	550	272	804	15	
LT275/65R18	123/120	Q	8 J	D:1400 S:1550	550	279	815	15	
LT265/75R16	126/123	Q	8 J	D:1550 S:1700	550	286	834	15	
LT285/70R17	121/118	Q	8 1/2 J	D:1320 S:1450	450	292	832	15	
LT235/80R17	120/117	Q	6 1/2 J	D:1265 S:1400	550	235	808	14	




RADIAL666

Metric Series Radial Light Truck Tyres

EXCELLENT TRACTION. SKID PREVENTION ON WET ROAD. ROBUST CONSTRUCTION TO IMPROVE BEAD AREA DURABILITY.

165/70R14C	69/87	R	5J	D:545 S:580	375	170	588	8.0	
175/75R16C	101/99	R	5J	D:775 S:825	475	177	668	8.0	
185/75R16C	104/102	R	5J	D:850 S:900	475	184	684	8.5	
195/70R15C	100/98	Q	6J	D:750 S:800	375	201	655	10.5	
195/70R15C	104/102	R	6J	D:850 S:900	450	201	655	10.5	
205/75R16C	110/108	R	5 1/2 J	D:1000 S:1060	475	203	714	10.5	
215/75R16C	113/111	R	6J	D:1000 S:1120	475	216	728	10.5	
225/70R16C	112/110	R	6 1/2 J	D:1000 S:1120	450	228	697	10.5	
225/75R16C	121/120	R	6J	D:1400 S:1480	575	223	744	8.0	

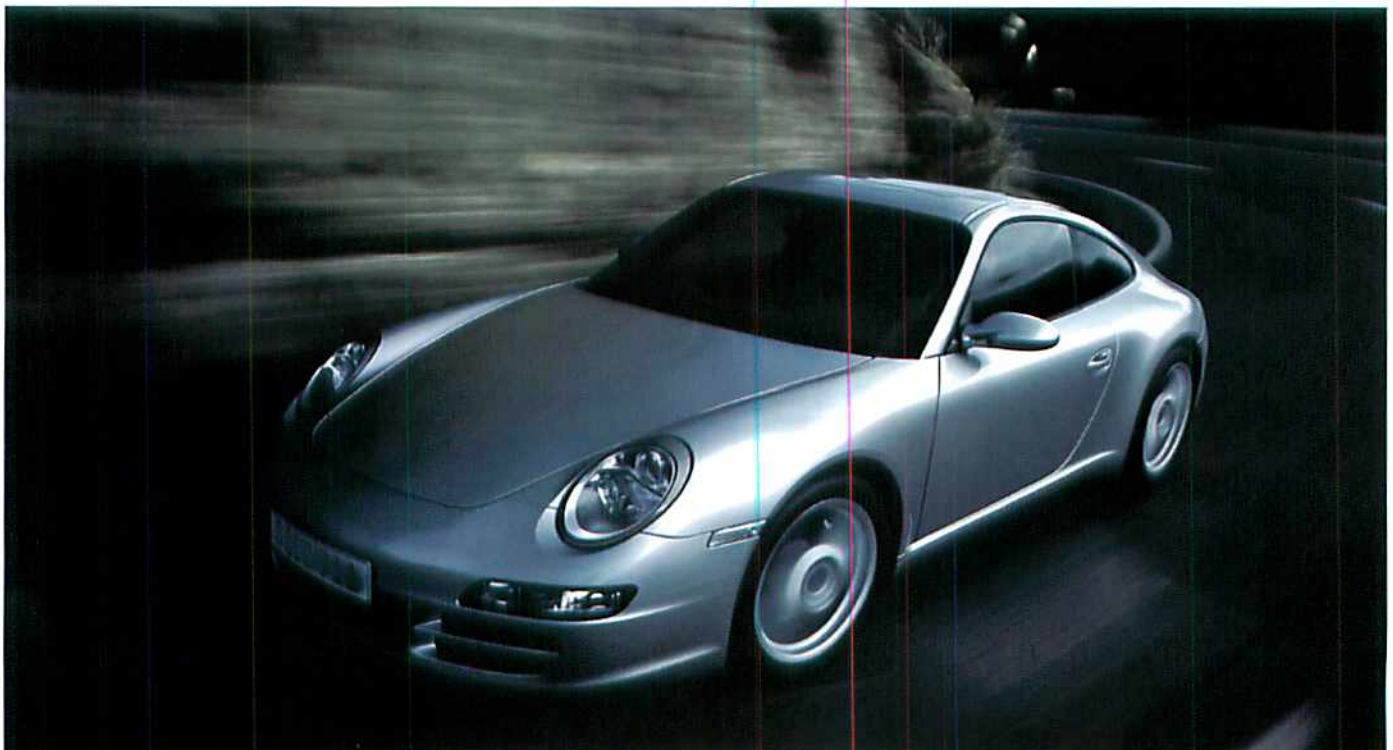

BIAS TRUCK TYRES



LL1

Bias Truck/Bus Tyres

LOW ROLLING RESISTANCE GOOD WEAR, CRACKING RESISTANCE AND HEAT DISSIPATION.

12.00-24	18	158/154	G	8.5	D3680 S4195	740 810	315	1225	15.0
----------	----	---------	---	-----	----------------	------------	-----	------	------



LL6

Bias Truck/Bus Tyres

GOOD WEAR CRACKING AND HIGH TRACTION.

12.00-24	18	158/154	G	8.5	D3680 S4195	740 810	315	1225	16.0	
9.00-20	14	141/136 145/140	G	7.0	D2255 S2575	D2500 S2900	700 770	810 880	259 1018	15.0



LL2

Bias Truck/Bus Tyres

GOOD WEAR CRACKING AND HIGH TRACTION.

12.00-20	16	18	152/147 154/149	G	8.5	D3080 S3520	D3270 S3730	570 740	740 810	315	1125	15.0
10.00-20	16	18	146/142 150/145	G	7.5	D2630 S3000	D2900 S3350	740 810	840 910	278	1055	15.0
9.00-20	14	16	141/136 145/140	G	7.0	D2255 S2575	D2500 S2900	700 770	810 880	259	1018	15.0



LL7

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING AND SIDE SLIP RESISTANCE.

7.50-20	12	14	128/124 129/125	G	6.0	D1555 S1775	D1655 S1885	670 740	740 810	215	935	14.0
---------	----	----	--------------------	---	-----	----------------	----------------	------------	------------	-----	-----	------



LL3

Bias Truck/Bus Tyres

GOOD WEAR CRACKING SIDE SLIP RESISTANCE AND HEAT DISSIPATION.

8.25-20	10	14	129/124 136/131	G	6.5	D1590 S1815	D1940 S2205	530 600	740 810	235	974	15.0
---------	----	----	--------------------	---	-----	----------------	----------------	------------	------------	-----	-----	------



LL8

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE.

7.00-20	10	12	121/117 124/120	G	5.5	D1255 S1430	D1385 S1580	550 630	670 740	200	904	12.0
---------	----	----	--------------------	---	-----	----------------	----------------	------------	------------	-----	-----	------



LL4

Bias Truck/Bus Tyres

GOOD WEAR CRACKING RESISTANCE.

11.00-20	16	18	149/145 153/148	G	8.0	D2870 S3270	D3150 S3650	740 810	840 910	293	1085	16.0
9.00-20	14	16	141/136 145/140	G	7.0	D2255 S2575	D2500 S2900	700 770	810 880	259	1018	15.0



LL9

Bias Light Truck Tyres

LOW NOISE AND ROLLING RESISTANCE GOOD HEAT DISSIPATION.

7.50-16LT	10	12	14	116/112 120/116 122/118	K	6.00G	D1105 S1280	D1240 S1425	D1300 S1500	530 530	630 630	730 730	215	805	11.5
7.50-15LT	10	12	114/110 119/115	K	6.00G	D1060 S1200	D1210 S1370	530 530	630 630	215	780	11.0			
6.50-15LT	6	8	10	95/91 101/97 104/101	K	4.50E	D810 S890	D720 S802	D895 S995	320 320	420 420	530 530	180	730	9.0
6.00-15LT	8	10	97/92 101/97	K	4.50E	D630 S720	D730 S830	420 420	530 530	170	705	9.0			
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850 850	215	805	11.5						



LINGLONG TYRE



LL10

Bias Light Truck Tyres

GOOD SIDE SLIP RESISTANCE AND BRAKING PROPERTY.

7.50-16LT	8 10	111/107 116/112	K	6.00G	D970 D1105 S1105 S1260	420 530 420 530	215	805	13.0
-----------	------	--------------------	---	-------	---------------------------	--------------------	-----	-----	------



LL15

Bias Light Truck Tyres

GOOD WEAR CRACKING RESISTANCE.

8.25-16LT	14 16	126/122 128/124	K	6.50H	D190 D190 S170 S180	420 530 420 530	235	855	14.5
7.50-16LT	10 12 14	118/112 119/116	K	6.00G	D108 D140 D120 S120 S140 S130	420 530 730 420 530 730	215	805	13.0
6.50-16LT	8 10 12	107/104 107/102	K	5.50F	D158 D260 D265 S665 S775 S100	420 530 730 420 530 730	185	750	10.0
6.50-15LT	8 10	101/97 106/101	K	4.50E	D720 D825 S600 S605	420 530 420 530	180	730	9.0
6.50-14LT	8 10	99/95 103/99	K	4/J	D690 D790 S785 S885	420 530 420 530	180	705	9.0
6.00-14LT	8 10	95/90 99/95	K	4/J	D600 D690 S665 S775	420 530 420 530	170	680	9.0
6.00-13LT	6 8	88/83 94/89	K	4/J	D480 D570 S555 S555	300 420 300 420	170	655	9.0
6.00-15LT	8 10	97/92 101/97	K	4.50E	D630 D730 S795 S895	420 530 420 530	170	705	9.0
7.50-16LT	16	126/123	K	6.00G	D130 S170	420 530 420 530	215	805	13.0



LL11

Bias Light Truck Tyres

LOW NOISE, GASOLINE SAVING, GOOD WEAR RESISTANCE AND HEAT DISSIPATION.

7.00-16LT	8 10 12 14	107/102 107/100 107/98	K	5.50F	D660 D665 D1070 D1180 S965 S1100 S1220 S1300	420 530 630 730 420 530 630 730	200	775	12.0
7.00-15LT	10 12	109/105 113/109	K	5.50F	D915 D1030 S1040 S1150	530 630 530 630	200	750	10.0
6.50-16LT	8 10 12	102/98 107/103 110/104	K	5.50F	D755 D860 S855 S975	420 530 630 420 530 630	185	750	10.0



LL14

Bias Light Truck Tyres

LOW ROLLING RESISTANCE GOOD WEAR AND CRACKING RESISTANCE GOOD MULTIPLE FUNCTION.

6.50-16LT	8 10	102/98 107/103	K	5.50F	D755 D860 S855 S975	420 530 420 530	185	750	10.5
-----------	------	-------------------	---	-------	------------------------	--------------------	-----	-----	------



LL16

Bias Light Truck Tyres

GOOD WEAR AND CRACKING RESISTANCE LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

6.50-14LT	8 10	99/95 103/99	K	4/J	D690 D790 S785 S885	420 530 420 530	180	705	9.0
-----------	------	-----------------	---	-----	------------------------	--------------------	-----	-----	-----



BIAS TRUCK TYRES



LL17

Bias Light Truck Tyres

GOOD WEAR AND CRACKING RESISTANCE
LOW ROLLING RESISTANCE GOOD HEAT
DISSIPATION AND SIDE SLIP RESISTANCE.

6.00-14LT	8	10	95/90 99/95	K	4 1/2 J	D600 S685	D690 S775	420 420	530 530	170	680	9.0
-----------	---	----	----------------	---	---------	--------------	--------------	------------	------------	-----	-----	-----



LL21

Bias Mini Truck Tyres

GOOD WEAR AND CRACKING RESISTANCE
LOW ROLLING RESISTANCE AND GOOD
HEAT DISSIPATION.

4.50-12ULT	8	78/76	K	3.00B	D395 S415	400 400	127	545	7.0
------------	---	-------	---	-------	--------------	------------	-----	-----	-----



LL18

Bias Light Truck Tyres

GOOD WEAR AND CRACKING RESISTANCE
GASOLINE SAVING AND GOOD HEAT
DISSIPATION.

6.00-13LT	6	8	88/83 94/89	K	4 1/2 J	D485 S555	D570 S655	320 320	420 420	170	655	9.0
-----------	---	---	----------------	---	---------	--------------	--------------	------------	------------	-----	-----	-----



LL24

Passenger Car Bias Tyres

GASOLINE SAVING GOOD WEAR, SIDE SLIP
RESISTANCE AND HEAT DISSIPATION.

6.00-12	8	78	K	4.50B	420	260	156	574	7.0
---------	---	----	---	-------	-----	-----	-----	-----	-----



LL19

Bias Light Truck Tyres

LOW NOISE GASOLINE SAVING GOOD WEAR
RESISTANCE AND HEAT DISSIPATION.

5.50-13LT	8	88/84	K	4J	D500 S565	420 420	160	620	9.0
5.60-13	4	70 82	K	4J	330 475	170 320	145	600	6.0



LL39

Industrial Tyres

GOOD WEAR CRACKING AND SIDE SLIP
RESISTANCE

28X9-15	12	7.0	3035	700	220	710	13.0
8.15-15	12	7.0	3230	840	215	704	16.0
7.00-15	12	5.50S	2900	850	194	735	20.0
6.50-10	10	5.00F	1655	790	175	590	15.0



LL20

Bias Mini Truck Tyres

LOW ROLLING RESISTANCE GOOD WEAR
AND CRACKING RESISTANCE, GOOD HEAT
DISSIPATION, LOW NOISE.

5.00-12ULT	8	10	83/82 88/87	K	3.50B	D465 S485	D535 S555	400 400	500 500	143	568	8.0
5.00-10ULT	8	78/77	K	3.50B	D410 S430	400 400	143	517	8.0			



LL41

Bias Light Truck Tyres

GOOD WEAR AND CRACKING RESISTANCE
GOOD MULTIPLE FUNCTION.

5.50-12ULT	10	92/89	K	4J	620	530	160	594	8.0
------------	----	-------	---	----	-----	-----	-----	-----	-----



LINGLONG TYRE



LL45

Industrial Tyres

GOOD WEAR CRACKING SIDE SLIP RESISTANCE AND STABLE RESISTANCE.

Size	Load Index	Speed Rating	Rolling Resistance	Wear Resistance	Cracking Resistance	Slip Resistance	Heat Dissipation	Noise
8.25-15	14	6.5	3775	830	235	840	15.0	
7.00-12	12	5.00S	2375	860	190	676	12.0	
6.50-10	10	5.00F	1655	790	175	590	15.0	
6.00-9	10	4.00E	1505	860	160	540	10.0	
5.00-8	10	3.50D	1150	1000	137	470	12.0	



LL51

Bias Light Truck Tyres

LOW NOISE GASOLINE SAVING GOOD WEAR AND CRACKING RESISTANCE GOOD SIDE SLIP RESISTANCE AND HEAT DISSIPATION.

Size	Load Index	Speed Rating	Rolling Resistance	Wear Resistance	Cracking Resistance	Slip Resistance	Heat Dissipation	Noise	
6.00-13LT	8	94/89	K	4 ¹ / _J	D570 S655	420 420	170	655	9.0
5.00-12ULT	8	83/82	K	3.50B	D465 S485	400 400	143	568	8.0
4.50-12ULT	8	78/76	K	3.00B	D395 S415	400 400	127	545	7.0



LL47

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

Size	Load Index	Speed Rating	Rolling Resistance	Wear Resistance	Cracking Resistance	Slip Resistance	Heat Dissipation	Noise	
12.00-20	16 18	152/147 154/150	G	8.5	D3080 D3270 S3520 S3730	670 740 740 810	315	1125	16.0
11.00-20	16 18	150/145 153/148	G	8.0	D2870 D3150 S3270 S3650	740 840 810 910	293	1085	15.0
10.00-20	16 18	146/142 150/145	G	7.5	D2630 D2900 S3000 S3350	740 840 810 910	278	1055	15.0
9.00-20	14 16	141/136 145/140	G	7.0	D2255 D2500 S2575 S2900	700 810 770 880	259	1018	15.0
8.25-20	14	136/131	G	6.5	D1940 S2205	740 810	235	974	15.0
7.00-20	10 12	121/117 124/120	G	5.5	D1255 D1385 S1430 S1580	560 670 630 740	200	904	12.0
8.25-16LT	14	126/122	K	6.50H	D1500 S1705	630	235	855	12.5
8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	855	12.5



LL57

Bias Truck/Bus Tyres

GOOD HEAT DISSIPATION MULTIPLE FUNCTIONS AND CRACKING RESISTANCE.

Size	Load Index	Speed Rating	Rolling Resistance	Wear Resistance	Cracking Resistance	Slip Resistance	Heat Dissipation	Noise	
10.00-20	16	146/142	G	7.5	D2630 S3000	740 810	278	1055	16.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1055	16.0



LL48

Bias Truck/Bus Tyres

GASOLINE SAVING, LOW NOISE, GOOD WEAR RESISTANCE AND HEAT DISSIPATION.

Size	Load Index	Speed Rating	Rolling Resistance	Wear Resistance	Cracking Resistance	Slip Resistance	Heat Dissipation	Noise	
9.00-20	14 16	G	141/136 145/140	7.0	D2255 D2500 S2575 S2900	700 810 770 880	259	1018	15.0



LL58

Bias Truck/Bus Tyres

SHELL STRENGTH HIGH, AVAILABLE FOR LARGE LOAD.

Size	Load Index	Speed Rating	Rolling Resistance	Wear Resistance	Cracking Resistance	Slip Resistance	Heat Dissipation	Noise	
10.00-20	16 18	G	146/142 150/145	7.5	D2630 D2900 S3000 S3350	740 840 810 910	278	1055	16.0

BIAS TRUCK TYRES



LL59

Bias Truck/Bus Tyres

AVAILABLE FOR LARGE LOAD GOOD WEAR AND STABLE RESISTANCE.

Size	Load Index	Speed Rating	Grade	Temp. Res.	Rolling Res.	Wear	Cracking	Heat Diss.	Slip
12.00-20	16 18	152/148 154/150	G	8.5	D3080 S3520 D3270 S3730	670 740 740 810	315	1125	15.0
11.00-20	16 18	149/145 153/148	G	8.0	D2870 S3270 D3150 S3650	740 840 810 910	293	1085	15.0
10.00-20	16 18	146/142 150/145	G	7.5	D2630 S3000 D2900 S3350	740 840 810 910	278	1055	14/16
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	14/16
14.00-20	18	160/156	E	10.0	D3970 S4525	600 670	375	1240	20.0
14.00-20	20	164/159	E	10.0	D4365 S4980	700 770	375	1240	20.0
8.25-16LT	14 16	126/122 128/124	K	6.50H	D1500 S1705 D1800 S1950	630 730	235	855	14.5
7.50-16LT	14 16	122/118 126/123	K	6.00G	D1320 S1500 D1520 S1700	730 850	215	805	12.0



LL62

Bias Light Truck Tyres

GOOD WEAR AND CRACKING RESISTANCE GOOD SIDE SLIP RESISTANCE.

Size	Load Index	Speed Rating	Grade	Temp. Res.	Rolling Res.	Wear	Cracking	Heat Diss.	Slip
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	815	16.0
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	815	16.0



LL64

Passenger Car Bias Tyres

LOW ROLLING RESISTANCE GOOD WEAR, CRACKING RESISTANCE AND HEAT DISSIPATION.

Size	Load Index	Speed Rating	Grade	Temp. Res.	Rolling Res.	Wear	Cracking	Heat Diss.	Slip
5.90-13	4	73/77	K	4J	370 415	170 210	150	616	8.0



LL60

Bias Truck/Bus Tyres

LOW ROLLING RESISTANCE GOOD WEAR, CRACKING RESISTANCE AND HEAT DISSIPATION.

Size	Load Index	Speed Rating	Grade	Temp. Res.	Rolling Res.	Wear	Cracking	Heat Diss.	Slip
11-22.5	12	140/135	F	8.25	S2500kg S510LBS D2180kpa S485LBS	590kpa 85psi 520kpa 75psi	279	1054	11.5
11-22.5	14	144/139	F	8.25	S2800kg S6175LBS D2430kpa S535LBS	S690kpa 100psi D620kpa 90psi	279	1054	11.5
11-22.5	16	146/142	F	8.25	S3000kg S6610LBS D2650kpa S640LBS	S790kpa 115psi D720kpa 105psi	279	1054	11.5



LL65

Industrial Tyres

GOOD WEAR CRACKING AND SIDE SLIP RESISTANCE.

Size	Load Index	Speed Rating	Grade	Temp. Res.	Rolling Res.	Wear	Cracking	Heat Diss.	Slip
10.00-15	14			7.5	2800	750	280	935	18.0



LL61

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

Size	Load Index	Speed Rating	Grade	Temp. Res.	Rolling Res.	Wear	Cracking	Heat Diss.	Slip
7.50-20	12 14	128/124 129/125	G	6.0	D1555 S1775 D1655 S1885	670 740 740 810	215	935	11.5



LL67

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

Size	Load Index	Speed Rating	Grade	Temp. Res.	Rolling Res.	Wear	Cracking	Heat Diss.	Slip
10.00-20	14	144/139	G	7.5	D2430 S2800	D620 S690	278	1054	11.0



LINGLONG TYRE



LL68

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

12.00-20	18	154/149	G	8.5	D3270 S3730	740 810	315	1145	15.0



LL80

Passenger Car Bias Tyres

LOW ROLLING RESISTANCE GOOD WEAR, CRACKING RESISTANCE AND HEAT DISSIPATION.

5.90-13	4	73	K	4J		370	170	150	616	9.0



LL75

Bias Light Truck Tyres

GOOD WEAR AND CRACKING RESISTANCE GOOD SIDE SLIP RESISTANCE.

4.50-10ULT	6	60/57	K	3.50D		250	300	120	470	7.0



LL87

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1073	20.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1073	23.0



LL77

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1073	20.0



LL88

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

10.00-20	16	146/142	G	7.5	D2630 S3100	740 810	278	1073	16.5
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	16.5



LL79

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

8.25-20	14	136/131	G	6.5	D1940 S2205	740 810	235	974	13.5



LL89

Bias Light Truck Tyres

GOOD WEAR AND CRACKING RESISTANCE GOOD SIDE SLIP RESISTANCE.

7.50-16LT	16	124/120	K	6.00G	D1390 S1580	758	215	815	15.5
8.25-16LT	16	128/124	K	6.50H	S1800 D1600	730	235	867	18.5

BIAS TRUCK TYRES



LL95

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

13.00-20	18	158/154	E	9.0	D3750 S4250	700 770	340	1177	18.0
----------	----	---------	---	-----	----------------	------------	-----	------	------



LA99

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	865	16.5
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	815	16.0



LL97

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1073	20.0
----------	----	---------	---	-----	----------------	------------	-----	------	------



LL96-T

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

7.00-16LT	14	118/114	G	5.50F	S1320 D1180	730	200	786	20
7.50-16LT	16	126/123/	G	6.00G	S1700 D1520	850	215	815	22
8.25-16LT	16	128/124	K	6.50H	S1800 D1600	730	235	867	22



LA96

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

12.00-20	18	154/150	G	8.5	D3270 S3730	740 810	315	1145	20.0		
11.00-20	16/18	149/145 153/148	G	8.0	D2870 S3270	D3150 S3650	740 810	910 840	293	1105	20.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1073	20.0		



LL109

Bias Truck/Bus Tyres

LOW ROLLING RESISTANCE GOOD WEAR, CRACKING RESISTANCE AND HEAT DISSIPATION.

8.25-16LT	16	128/124	K	6.50H	S1800 D1600	730	235	867	16.5
-----------	----	---------	---	-------	----------------	-----	-----	-----	------



LA98

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

12.00-20	18	154/150	G	8.5	D3270 S3730	740 810	315	1125	21.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1105	20.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1073	20.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1038	20.0



LL147

Bias Truck/Bus Tyres

LOW ROLLING RESISTANCE GOOD WEAR, CRACKING RESISTANCE AND HEAT DISSIPATION.

10.00-20	18	150/145	G	7.5	S3350 D2900	910/840	278	1073	17.0
----------	----	---------	---	-----	----------------	---------	-----	------	------



LL150

Bias Truck/Bus Tyres

LOW ROLLING RESISTANCE GOOD WEAR, CRACKING RESISTANCE AND HEAT DISSIPATION.

14.00-20	20	164/159	E	10.0	S4980 D4365	770 700	375	1265	26
----------	----	---------	---	------	----------------	------------	-----	------	----



LL168

Bias Truck/Bus Tyres

AVAILABLE FOR LARGE LOAD GOOD WEAR AND STABLE RESISTANCE.

6.50-16LT	10	107/103	K	5.50F	D860 S975	530	185	750	10
7.00-16LT	12	115/110	K	5.50F	S1220 D1075	630	200	775	11.5
7.50-16LT	12	120/116	K	6.00G	S1405 D1240	630	215	805	11.5
8.25-16LT	14	126/122	K	6.50H	D1500 S1705	630	235	855	12
7.50-20	14	129/125	G, K	6.0	D1655 S1885	740 810	215	935	11.5
8.25-20	14	136/131	G, K	6.5	D1940 S2205	740 810	235	974	14
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	14
10.00-20	16	146/142	G	7.5	S3000 D2630	810 740	278	1055	14
11.00-20	18	153/148	G	8.0	S3650 D3150	910 840	293	1085	15
11.00-20	16	150/145	G	8.0	S3270 D2870	810 740	293	1085	15



LL158

Bias Truck/Bus Tyres

LOW ROLLING RESISTANCE GOOD WEAR, CRACKING RESISTANCE AND HEAT DISSIPATION.

9.00-20	14	141/136	B	7.00T	D2255 S2575	D700 S770	259	1038	20
---------	----	---------	---	-------	----------------	--------------	-----	------	----



LL159

Bias Truck/Bus Tyres

AVAILABLE FOR LARGE LOAD GOOD WEAR AND STABLE RESISTANCE.

6.50-16LT	10	107/103	K	5.50F	D860 S975	530	185	750	10
7.50-16LT	12	120/116	K	6.00G	S1405 D1240	630	215	805	12
7.50-20	14	129/125	G	6.0	S1885 D1655	810 740	215	935	12
8.25-16LT	14	126/122	K	6.50H	S1705 D1500	630	235	855	13.5
8.25-20	14	136/131	G	6.5	D1940 S2205	740 810	235	974	13.5
10.00-20	16	146/142	G	7.5	S3000 D2630	810 740	278	1055	14.5
11.00-20	18	153/148	G	8.0	S3650 D3150	910 840	293	1085	15
12.00-20	18	154/150	G	8.5	D3270 S3730	740 810	315	1125	15



LL178

Bias Truck/Bus Tyres

AVAILABLE FOR LARGE LOAD GOOD WEAR AND STABLE RESISTANCE.

6.50-16LT	10	107/103	K	5.50F	D860 S975	530	185	750	10
7.00-16LT	12	115/110	K	5.50F	S1220 D1075	630	200	775	11.5
7.50-16LT	12	120/116	K	6.00G	S1405 D1240	630	215	805	11.5
7.50-20	14	129/125	G	6.0	S1885 D1655	810 740	215	935	11.5
8.25-16LT	14	126/122	K	6.50H	S1705 D1500	630	235	855	12
8.25-20	14	136/131	G, K	6.5	D1940 S2205	740 810	235	974	13

OTR TYRES



LL25

OTR Tyres

AVAILABLE FOR LOADERS AND DOZERS AND CHARACTERIZED WITH WEAR AND PUNCTURE RESISTANCE AND WIDE APPLICATIONS.

29.5-25	28	25.00/3.5	17500	425	750	1875	40.0	TL	
26.5-25	28	22.00/3.0	15500	475	675	1750	40.0	TT/TL	
23.5-25	16 20	19.50/2.5	9500 10900	300 375	595	1615	31.5	TT/TL	
20.5-25	16 20	17.00/2.0	8250 9500	350	450	520	1490	28.5	TT/TL
17.5-25	12 14 16	14.00/1.5	6150 6650 7300	350	420 475	445	1350	25.5	TT/TL
16.00-25	28	11.25/2.0	6700	575	430	1490	28.5	TT/TL	
15.5-25	12	12.00/1.3	5600	400	395	1275	25.0	TL	



LL56

OTR Tyres

AVAILABLE FOR MOBILE CRANES AND CHARACTERIZED WITH STABLE DRIVING AND EXCELLENT LOW SPEED AND HIGH LOADING PROPERTIES.

18.00-25	32	13.00/2.5	8750	575	495	1615	30.0		



LL26

OTR Tyres

AVAILABLE FOR MOBILE CRANES AND CHARACTERIZED WITH STABLE DRIVING AND EXCELLENT LOW SPEED AND HIGH LOADING PROPERTIES.

18.00-25	40	13.00/2.5	9750	700	495	1615	30.0	TL	
18.00-25	32	13.00/2.5	8750	575	495	1615	30.0	TT	



LL63

Smooth and Ultra Deep Tread Tubeless OTR Tyres

AVAILABLE FOR LOADERS OPERATING UNDER SERIOUS TOUGH SERVICE CONDITIONS IN TUNNELS AND CHARACTERIZED WITH EXCELLENT WEAR AND CUT RESISTANCE. FLAT AND SMOOTH THICK TREAD IMPROVES THE PUNCTURE RESISTANCE TO STONE.

10.00-20	14	7.5	3260	670	278	1073	-		



LL42

OTR Tyres

AVAILABLE FOR LARGE SELF-DISCHARGING TRUCKS, LOADERS AND ROAD GRADERS. CHARACTERIZED WITH GOOD WEAR RESISTANCE AND GRIP PROPERTY AND SELF-CLEANING PROPERTY.

14.00-24	16 24	10.0	4000 5150	375 575	375	1370	30		



LL66A

OTR Tyres

AVAILABLE FOR LOADERS OPERATING UNDER SERIOUS TOUGH SERVICE CONDITIONS IN TUNNELS AND CHARACTERIZED WITH EXCELLENT WEAR AND CUT RESISTANCE. FLAT AND SMOOTH THICK TREAD IMPROVES THE PUNCTURE RESISTANCE TO STONE.

12.00-24	16	8.5	6150	675	315	1247	-		
7.50-16	14	6.00G	2390	700	215	810	-		



LL55

OTR Tyres

AVAILABLE FOR LOADER AND DOZERS AND CHARACTERIZED WITH WEAR RESISTANCE AND GRIP PROPERTY AND SELF-CLEANING PROPERTY.

16/70-20	10	13	2400	250	410	1075	20.0		
16/70-20	14	13	5150	450	410	1075	20.0		



G-2

OTR Tyres

WITH GOOD DIRECTIVITY AND GOOD TRACTION. THE PATTERN USED OFF-ROAD HAS SELF-CLEANING PROPERTY AND COMFORT.

13.00-24	12	8.00TG	2725	300	330	1280	24.0		
14.00-24	12	8.00TG	3075	250	360	1350	24.0		



LINGLONG TYRE



E2/L2

OTR Tyres

WITH GOOD DIRECTIVITY AND GOOD TRACTION. THE PATTERN USED OFF-ROAD HAS SELF-CLEANING PROPERTY AND COMFORT.

15.5-25	12	12.00/1.3	5600	400	395	1275	24.0
17.5-25	12/14/16	14.00/1.5	6150/6700/7300	350/400/475	445	1350	25.5



E-4A

OTR Tyres

SUITABLE FOR HEAVY LOADERS, USE ON BAD ROAD OF MINE, STONE PIT & TUNNEL ETC. IT HAS GOOD FUNCTION OF ANTI-CUT, IMPALE RESISTANCE AND WEAR RESISTANCE.

24.00-35E4	42	17.00/3.5	17000	575	650	2175	58.0
24.00-49E4	42	17.00/3.5	20600	575	650	2530	58.0
24.00-49E4	48	17.00/3.5	21800	650	650	2530	58.0
27.00-49E4	42	19.50/4.0	23000	500	735	2705	65.0
27.00-49E4	48	19.50/4.0	25000	575	735	2705	65.0
33.00-51E4	58	24.00/5.0	35500	575	895	2995	75.0
36.00-51E4	58	26.00/5.0	41250	625	990	3165	82.0



LL66B

OTR Tyres

AVAILABLE FOR LOADERS OPERATING UNDER SERIOUS TOUGH SERVICE CONDITIONS IN TUNNELS AND CHARACTERIZED WITH EXCELLENT WEAR AND CUT RESISTANCE. FLAT AND SMOOTH THICK TREAD IMPROVES THE PUNCTURE RESISTANCE TO STONE.

9.00-20	14	7.0	4375	725	256	1002	-
---------	----	-----	------	-----	-----	------	---



E2/L2

OTR Tyres

WITH GOOD DIRECTIVITY AND GOOD TRACTION. THE PATTERN USED OFF-ROAD HAS SELF-CLEANING PROPERTY AND COMFORT.

20.5-25	12/16/20	17.00/2.0	8700/8250/9500	250/350/450	520	1490	30.0
23.5-25	12/16/20	19.50/2.5	8000/9500/10900	225/300/375	595	1615	31.5



E-4

OTR Tyres

SUITABLE FOR HEAVY LOADERS, USE ON BAD ROAD OF MINE, STONE PIT & TUNNEL ETC. IT HAS GOOD FUNCTION OF ANTI-CUT, IMPALE RESISTANCE AND WEAR RESISTANCE.

21.00-33E4	32	15.00/3.0	10300	500	575	1940	42.0
------------	----	-----------	-------	-----	-----	------	------



LL90

OTR Tyres

AVAILABLE FOR MOBILE CRANES AND CHARACTERIZED WITH STABLE DRIVING AND EXCELLENT LOW SPEED AND HIGH LOADING PROPERTIES.

18.00-33	32	13.00	17500	750	495	1877	50.0
18.00-33	40	13.00	20000	950	495	1877	50.0



E-4

OTR Tyres

SUITABLE FOR HEAVY LOADERS, USE ON BAD ROAD OF MINE, STONE PIT & TUNNEL ETC. IT HAS GOOD FUNCTION OF ANTI-CUT, IMPALE RESISTANCE AND WEAR RESISTANCE.

23.5-29E3/L3	38	25.00/3.5	19000	425	750	1975	40.0
21.00-35E4	32	15.00/3.0	12100	500	575	2005	42.0
21.00-35E4	36	15.00/3.0	12800	550	575	2005	42.0
21.00-35E4	40	15.00/3.0	14000	625	575	2005	42.0



L-5

OTR Tyres

AVAILABLE FOR MOBILE CRANES AND CHARACTERIZED WITH STABLE DRIVING AND EXCELLENT LOW SPEED AND HIGH LOADING PROPERTIES.

35/65-33	36	10	28.00/3.5	23600	525	890	2030	58.0
----------	----	----	-----------	-------	-----	-----	------	------

AGRICULTURAL TYRES



E-3/L-3

OTR Tyres

SUITABLE FOR HEAVY LOADERS, USE ON BAD ROAD OF MINE, STONE PIT & TUNNEL ETC. IT HAS GOOD FUNCTION OF ANTI-CUT, IMPALE RESISTANCE AND WEAR RESISTANCE.

29.5-29E3/L3 38	25.00/3.5	19000	425	750	1975				



LL2

Agricultural Tyres

GOOD WEAR CRACKING AND SIDE SLIP RESISTANCE.

7.00-16 10 12 14	5.50F	1100 1220 1320	530 630 730	200	775	12.0			
4.00-14 6	3.00D	350	400	110	590	8.0			
4.00-12 6	3.00D	240	360	110	535	7.5			
4.00-8 4 6 8	3.00D	180 410 700	340 420 530	110	425	6.5			



LL102

Industrial Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

10-16.5NHS 12	8.25	2375	620	264	773	13			
12-16.5NHS 12	9.75	2865	520	307	831	13			



LL11

Agricultural Tyres

LOW ROLLING RESISTANCE GOOD WEAR AND CRACKING RESISTANCE AND HEAT DISSIPATION.

6.50-16 8 10	5.50F	855 975	420 530	185	750	10.0			
7.00-16 10 12 14	5.50F	1100 1220 1320	530 630 730	200	775	12.0			



LL103

Industrial Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

12-16.5LT 10	9.75	S1614 D1418	420	307	831	13			
12-16.5LT 12	9.75	S1650 D1650	520	307	831	13			



LL14

Agricultural Tyres

GOOD WEAR AND SIDE SLIP RESISTANCE AND GOOD MULTIPLE FUNCTION.

6.50-16 8 10	5.50F	855 975	420 530	185	750	10.5			
5.00-16 8 10	3.00D	1200 1350	600 650	135	680	8.0			



LL101

Bias Truck/Bus Tyres

GOOD WEAR, CRACKING RESISTANCE, LOW ROLLING RESISTANCE AND GOOD HEAT DISSIPATION.

16.9-28 12	W15L	3450	260	429	1410	28			
19.5L-24 12	DW16	3450	230	495	1314	30			



LL17

Agricultural Tyres

LOW ROLLING RESISTANCE GOOD WEAR AND CRACKING RESISTANCE AND HEAT DISSIPATION.

4.50-14 8	3.00D	1000	450	120	602	8.0			



LINGLONG TYRE



LL15

Agricultural Tyres

GOOD WEAR CRACKING AND SIDE SLIP RESISTANCE.

7.50-16	14	6.00G	1500	730	215	805	13.0	
6.50-16	8 10	5.50F	855 975	420 530	185	750	10.0	
6.00-16	6 10	4.50E	635 755	320 420	170	730	9.0	
4.00-16	6 8	3.00D	800 1000	400 460	110	640	8.0	



LL28

Agricultural Tyres

GOOD MULTIPLE FUNCTION.

4.00-16	6 8	3.00D	800 1000	400 460	110	640	8.0	



LL19

Agricultural Tyres

LOW NOISE AND GASOLINE SAVING GOOD WEAR RESISTANCE AND HEAT DISSIPATION.

5.50-14	8	3.00D	595	390	158	635	9.0	



LL29

Agricultural Tyres

GOOD MULTIPLE FUNCTION.

4.50-16	6 8 10	3.00D	815 1000 1325	360 450 530	122	655	8.0	
5.00-14	8	3.00D	1200	530	137	628	8.0	



LL21

Agricultural Tyres

LOW ROLLING RESISTANCE GOOD WEAR AND CRACKING RESISTANCE AND HEAT DISSIPATION.

4.50-12	8	3.00B	415	400	127	545	7.0	



LL27

Agricultural Tyres

GOOD MULTIPLE FUNCTION.

4.50-14	8	3.00D	1000	450	120	602	8.0	



LL31

Agricultural Tyres

GOOD WEAR PUNCTURE RESISTANCE AND GRIP PROPERTY AND SELF-CLEANING PROPERTY.

16.9-34	8 10	W15L	2380 2605	170 200	430	1585	37.0	
14.9-28	6 8	W13	1610 1860	140 180	378	1365	38.0	
14.9-24	6 8	W13	1510 1760	140 180	378	1265	38.0	
12.4/-28	6 8	W11	1275 1510	170 230	315	1260	38.0	
12-38	8	DW11	1570	140	330	1575	35.0	
11.2-24	6 8	W10	1045 1225	180 240	285	1105	35.0	
10-15	8	9.00	950	310	254	775	20.0	
9.5-24	6	W8	940	210	240	1050	30.0	
9.5-20	8	W8	955	280	240	950	30.0	
8.5-20	8	W7	880	250	210	895	30.0	
8.3-24	6 8	W7	810 920	240 280	210	995	30.0	
7.50-20	6 8	5.50F	760 880	210 280	205	910	24.0	
7.50-16	6 8	5.50F	650 700	210 240	205	810	23.0	
6.00-16	6	4.50E	495	250	160	745	22.0	
6.00-14	6 8	4.50E	450 685	250 420	165	690	20.5	
6.00-12	4 6	4.50E	335 405	180 250	165	640	22.0	
5.50-17	6	4.00E	440	250	145	750	22.0	
5.00-12	4	4.00E	280	200	145	590	22.0	

AGRICULTURAL TYRES



LL30

Agricultural Tyres

GOOD SIDE SLIP RESISTANCE AND WEAR RESISTANCE AND GOOD TRACTION PROPERTY.

Size	Speed	Load Index	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)
6.50-20	8	5.00F	865	420	180	860	16.0	
6.00-16	6	4.50E	495	250	165	745	13.0	
5.00-14	8	3.00D	500	450	137	628	12.0	
4.50-16	6	3.00D	615	360	122	655	10.0	
4.50-14	8	3.00D	1000	450	120	602	10.0	
4.00-16	6 8	3.00D	800 1000	400 460	110	640	10.0	
4.00-14	4	3.00D	270	340	110	590	10.0	
4.00-12	6	3.00D	240	360	110	535	10.0	



LL38

Agricultural Tyres

GOOD WEAR CRACKING AND SIDE SLIP RESISTANCE.

Size	Speed	Load Index	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)
5.50-16	10	4.00E	1325	530	150	685	8.0
5.00-16	10	3.00D	1350	650	135	680	8.0
4.50-16	10	3.00D	1325	530	122	655	8.0



LL32

Agricultural Tyres

GOOD WEAR PUNCTURE RESISTANCE AND GRIP PROPERTY AND SELF-CLEANING PROPERTY.

Size	Speed	Load Index	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)
7.50-16	10 14	5.50F	800 1030	320 460	205	810	20.0	
7.00-16	14	5.50F	1010	460	190	785	18.0	
6.50-16	10 14	5.00F	635 815	300 460	180	765	18.0	
6.00-16	10	4.50E	755	420	170	730	18.0	
5.50-16	10	4.50E	600	300	150	715	16.0	



LL40

Agricultural Tyres

GOOD WEAR CRACKING RESISTANCE AND GOOD TRACTION.

Size	Speed	Load Index	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)
10-15	8	9.00	1240	300	272	752	10.0



LL46

Agricultural Tyres

GOOD WEAR AND PUNCTURE RESISTANCE, GOOD GRIP PROPERTY AND BIG TRACTION PROPERTY.

Size	Speed	Load Index	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)
16.9-30	8	W15L	2245	170	430	1485	39.0
16.9-28	8	W15L	2175	170	430	1435	39.0
15-24	10	DW14	2800	280	410	1330	33.0



LL37

Agricultural Tyres

GOOD WEAR PUNCTURE RESISTANCE AND GRIP PROPERTY.

Size	Speed	Load Index	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)
7.50-20	6	5.50F	760	210	205	910	24.0



LL76

Agricultural Tyres

GOOD WEAR AND PUNCTURE RESISTANCE, GOOD GRIP PROPERTY AND BIG TRACTION PROPERTY.

Size	Speed	Load Index	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)	Max Load (kg)
23.1-26	12	DW20	3610	170	587	1605	42.0



LL78

Agricultural Tyres

GOOD SIDE SLIP RESISTANCE AND WEAR RESISTANCE AND GOOD TRACTION PROPERTY.

12.00-18	12	9.00V	1800	350	327	1090	14.0	



LL82

Agricultural Tyres

GOOD SIDE SLIP RESISTANCE AND WEAR RESISTANCE AND GOOD TRACTION PROPERTY.

4.00-8	8	3.00D	700	530	110	425	6.5	
4.00-8	6	3.00D	410	420	110	425	6.5	



LL81

Agricultural Tyres

SPECIAL FOR PADDY FIELD.

9.5-24	8	W8	1510	280	240	1150	80.0	



LL71

Agricultural Tyres

GOOD WEAR AND PUNCTURE RESISTANCE AND GRIP PROPERTY AND SELF-CLEANING PROPERTY.

28L-26	14	DW25	4250	170	715	1615	100.0	
19.5L-24	10	17.00	2800	170	495	1382	92.0	
23.1-26	12	DW20	3610	170	587	1662	100	



设计 / 品牌 / 视觉
0532-85012040
www.linglong.cn

LINGLONG TYRES



TIRE GROUP INTERNATIONAL, INC.